

### APPLICATIONS

The MILGCOWPK Decorative Full Cut-off Wall Pack is ideal for security, accent and perimeter lighting. Applications include entrance ways, garages, and commercial buildings. The driver is a multi-volt and constant current design - solid state - high shock / vibration resistant. The housing is made of a die-cast aluminum. The lens is a glass optical diffuser. Standard finish is bronze. Back plate with cast-in knockouts for alignment with all standard recessed boxes.



### FEATURES & BENEFITS

- ◆ Heavy Duty Die Cast Aluminum Housing
- ◆ Tempered Glass Lens
- ◆ Die Cast Hinged Front & Rear Housings, Gasket
- ◆ Coin Plugs on Sides and Back
- ◆ Built-In Template for Mounting to Electrical Box
- ◆ Chromate Conversion Coating
- ◆ Textured Bronze Finish
- ◆ Meets "Dark Sky" Requirements
- ◆ IP65 Rating
- ◆ cETL<sub>US</sub> or UL listed (wet location)

12-135W

Replaces  
Up to 400WMH



### ORDERING DATA

EXAMPLE: MILGCOWPKLED12MV30


MILGCOWPK		LED							
Series	Gear	Wattage/Lumens		Driver*		Color Temp*		Options	
<b>MILGCOWPK</b>	<b>LED</b>	<b>12</b>	12 Watts 1439 Lumens	<b>MV</b>	120-277VAC	<b>30</b>	3000K	<b>PC120</b>	Photo Cell, 120V
Large		<b>24</b>	24 Watts 2877 Lumens		Multivolt	<b>40</b>	4000K	<b>PC277</b>	Photo Cell, 277V
Decorative		<b>36</b>	35 Watts 4315 Lumens	<b>DMV</b>	120-277VAC	<b>50</b>	5000K	<b>EM</b>	Emergency*
LED Wall		<b>48</b>	47 Watts 5754 Lumens		0-10V Dimmable	<b>55</b>	5500K		
Pack		<b>60</b>	59 Watts 7193 Lumens						
		<b>72</b>	68 Watts 8631 Lumens						
		<b>84</b>	82 Watts 10070 Lumens						
		<b>90</b>	90 Watts 9500 Lumens						
		<b>96</b>	93 Watts 11508 Lumens						
		<b>135</b>	135 Watts 14000 Lumens						

\*See chart for availability

### SPECIFICATIONS

Model	Input Watts	CRI	Color Temp x100 (K)	Dimmable	Lens	EM	Replaces	UL/ETL	BAA Compliant
MILGCOWPKLED12MVxx	12W	≥80	30,40,50,55	Optional	Glass	Yes	70	ETL	Yes
MILGCOWPKLED24MVxx	24W	≥80	30,40,50,55	Optional	Glass	Yes	175	ETL	Yes
MILGCOWPKLED36MVxx	35W	≥80	30,40,50,55	Optional	Glass	Yes	250	ETL	Yes
MILGCOWPKLED48MVxx	47W	≥80	30,40,50,55	Optional	Glass	Yes	250	ETL	Yes
MILGCOWPKLED60MVxx	59W	≥80	30,40,50,55	Optional	Glass	Yes	250	ETL	Yes
MILGCOWPKLED72MVxx	68W	≥80	30,40,50,55	Optional	Glass	Yes	400	ETL	Yes
MILGCOWPKLED84MVxx	82W	≥80	30,40,50,55	Optional	Glass	Yes	400	ETL	Yes
MILGCOWPKLED90MVxx	90W	≥80	50	No	Glass	No	400	UL	No
MILGCOWPKLED96MVxx	93W	≥80	30,40,50,55	Optional	Glass	Yes	400	ETL	Yes
MILGCOWPKLED135MVxx	135W	≥80	50	No	Glass	No	400	UL	No

### DIMENSIONS

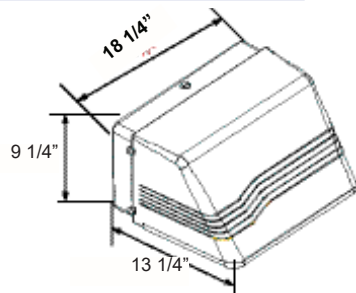

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	