

APPLICATIONS

The **MIMDCL Canopy** is a corrosion resistant Canopy designed to provide the long life and high reliability required in industrial and commercial applications. This fixture is ideal for parking garages, storage facilities, tunnels and gas stations.

FEATURES & BENEFITS

- ◆ Uses up to 88% less energy than HID equivalent
- ◆ 3-5x longer life than fluorescent or HID systems
- ◆ Instant On/Off
- ◆ Minimum operating temperature -22°F

SPECIFICATIONS

- ◆ Housing: Die Cast Aluminum
- ◆ Finish: Weather Resistant Dark Bronze Powder Coat*
- ◆ Lens: Prismatic Polycarbonate Diffuser with UV inhibitors
- ◆ Mounting Options: Directly over 4" outlet box or surface wired through 1/2" conduit entries
- ◆ Mounting Height: Up to 30 Feet
- ◆ Operating Voltage: 100~277 VAC 50/60Hz
- ◆ Power Factor: >0.98
- ◆ L70 > 50000 hrs
- ◆ Environment: Indoor/Outdoor; Wet Location
- ◆ ETL Listed
- ◆ Min CRI 80

*May be available in other finishes. Consult factory for details.



14W - 53W

Replaces
Up to 250W MH



ORDERING DATA

EXAMPLE: MIMDCLLED28MV50

MIMDCL									
Series	Gear	Wattage/Lumens		Driver		Color Temp ^{1,2}		Options ²	
MIMDCL LED Canopy	LED	14	14 Watts 1645 Lumens	MV	120-277 VAC	27	2700K	OS	Occ Sensor
		28	28 Watts 3015 Lumens	DMV	120-277VAC	30	3000K	PC	Photocell 120V
		42	42 Watts 4595 Lumens		0-10V Dimmable	35	3500K	PC277	Photocell 208/277V
		56	56 Watts 6250 Lumens	SDMV	Step Dimming	40	4000K	EM	Emergency Battery Backup
		70	70 Watts 7610 Lumens		120-277 VAC	50	5000K		
				HV	347-480 VAC	55	5500K		

NOTES

Consult for options & accessories
DLC Model: MIMDCLLED28MV40

Dimensions and specifications subject to change without notice.




TECHNICAL INFORMATION

Model	Input Watts	Color Temp (K)	Initial Lumens (lm)	Efficacy (lm/W)	CRI	DLC
MIMDCLLED14MV30	14W	3000	1280	91.43	>80	
MIMDCLLED14MV40	14W	4000	1280	91.43	>80	
MIMDCLLED14MV50	14W	5000	1280	91.43	>80	
MIMDCLLED14MV55	14W	5500	1280	91.43	>60	
MIMDCLLED28MV30	28W	3000	2560	91.43	>80	
MIMDCLLED28MV40	28W	4000	2560	91.43	>80	√
MIMDCLLED28MV50	28W	5000	2560	91.43	>80	
MIMDCLLED28MV55	28W	5500	2560	91.43	>60	
MIMDCLLED35DMV50	35W	5000	2550	73.0	>75	√
MIMDCLLED42MV30	42W	3000	3840	91.43	>80	
MIMDCLLED42MV40	42W	4000	3840	91.43	>80	
MIMDCLLED42MV50	42W	5000	3840	91.43	>80	
MIMDCLLED42MV55	42W	5500	3840	91.43	>60	
MIMDCLLED53MV50	53W	5000	5140	97.0	>80	

* Specs reflect nominal values. ** Standard configuration in bold. Specifications may be subject to change without notice.

DIMENSIONS

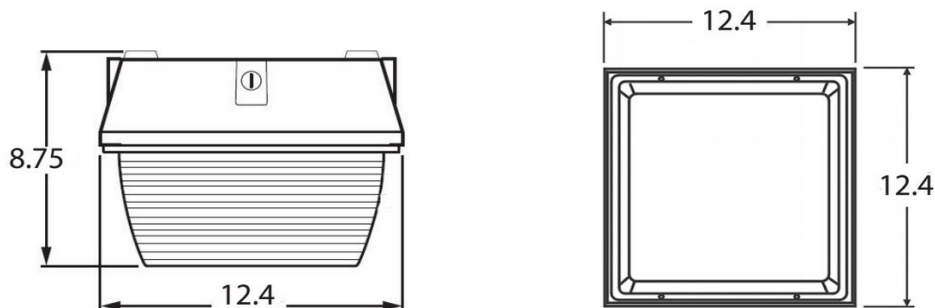

WARRANTY

Mobern Lighting Company warrants to the purchaser that this LED Fixture will be free from defects in material or workmanship for a period of 5 years from date of manufacture, when operated at a maximum ambient temperature of 110°F or 45°C, when properly installed and under normal conditions of use.

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#			
JOB NAME		TYPE	