

APPLICATIONS

The MIMDCLS Shallow Canopy is a 12" square canopy luminaire designed to provide the long life and high reliability required in industrial and commercial applications. It features an aluminum body and prismatic polycarbonate diffuser with UV inhibitors. This fixture is ideal for parking garages, storage facilities, tunnels and gas stations.

FEATURES & BENEFITS

- ◆ Engineered and constructed for exterior environments
- ◆ Can be mounted directly over an existing 4" outlet box or surface wired through a 1/2" conduit entry
- ◆ IP65 rated
- ◆ THD < 20, PF > 90
- ◆ 5 year warranty



ORDERING DATA

EXAMPLE: MIMDCLS-LED12DMVBZ50

Series		Gear		Wattage/Lumens		Driver		Finish**		Color Temp		Options	
MIMDCLS Shallow LED Canopy	LED	12		12 Watts	1439 Lumens	DMV	120-277VAC	BZ	Bronze	27	2700K	OS	Occ Sensor
		24		24 Watts	2877 Lumens		0-10V Dimmable	WH	White	30	3000K	PC120	Photocell 120V
		36		36 Watts	4315 Lumens	SDMV	Step Dimming	SI	Silver	35	3500K	PC277	Photocell 208/277V
		48		48 Watts	5754 Lumens		120-277 VAC	BK	Black	40	4000K	EM	Emergency Battery Backup
		60		60 Watts	7193 Lumens		100%-40%			50	5000K		
		72		72 Watts	8631 Lumens	HV	347-480 VAC*			55	5500K		

*Not available with photocell or occupancy sensor

**Consult for other options

TECHNICAL INFORMATION

Model	Tested Wattage	Color Temp (K)	Lumens	Efficacy (lm/W)
MIMDCLS-LED12_30	12 Watts	3000	1,370	114.17
MIMDCLS-LED12_40	12 Watts	4000	1,439	119.92
MIMDCLS-LED12_50	12 Watts	5000	1,510	125.83
MIMDCLS-LED24_30	24 Watts	3000	2,740	115.71
MIMDCLS-LED24_40	24 Watts	4000	2,877	121.49
MIMDCLS-LED24_50	24 Watts	5000	3,021	127.58
MIMDCLS-LED36_30	36 Watts	3000	4,110	119.93
MIMDCLS-LED36_40	36 Watts	4000	4,315	125.91
MIMDCLS-LED36_50	36 Watts	5000	4,531	132.21
MIMDCLS-LED48_30	48 Watts	3000	5,480	117.34
MIMDCLS-LED48_40	48 Watts	4000	5,754	123.21
MIMDCLS-LED48_50	48 Watts	5000	6,042	129.38
MIMDCLS-LED60_30	60 Watts	3000	6,850	116.91
MIMDCLS-LED60_40	60 Watts	4000	7,193	122.77
MIMDCLS-LED60_50	60 Watts	5000	7,552	128.90
MIMDCLS-LED72_30	72 Watts	3000	8,220	122.49
MIMDCLS-LED72_40	72 Watts	4000	8,631	128.61
MIMDCLS-LED72_50	72 Watts	5000	9,063	135.05



* Specs reflect nominal values.

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	

DIMENSIONS

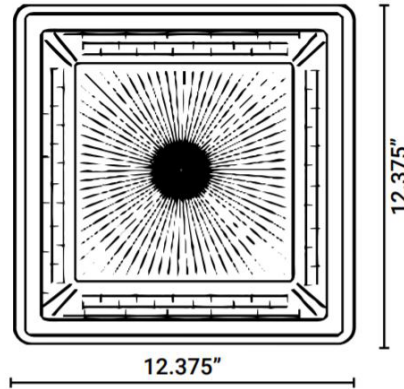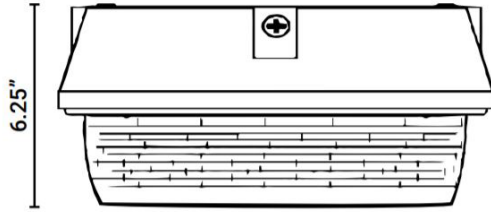

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	