

APPLICATIONS

Perfect for security, entry ways, stairways, storage and perimeter areas as well as residential exteriors.

FEATURES & BENEFITS

- ◆ Sealed die-casting profile for outdoor applications
- ◆ Consumes 17W to replace 120W Incandescent, 25W to replace 50W HID
- ◆ Lumen output from 1900-2700lm
- ◆ Supports direct wall mounting and J-Box mounting, with 1/2 inch entry at the bottom
- ◆ Built-in UL class 2 driver
- ◆ Optional 120V/277V photocell
- ◆ UL Wet Location listed




ORDERING DATA

EXAMPLE: MISMRWPKLED17MV50

MISMRWPK	LED		MV	50	
Series	Gear	Wattage / Lumens	Driver	Color Temp	Options
MISMRWPK LED Wall Mount	LED	17 17 Watts 2000 Lumens 25 25 Watts 2700 Lumens	MV 120-277VAC Multivolt	50 5000K	PC Photocell

1.2.3 Easy Installation

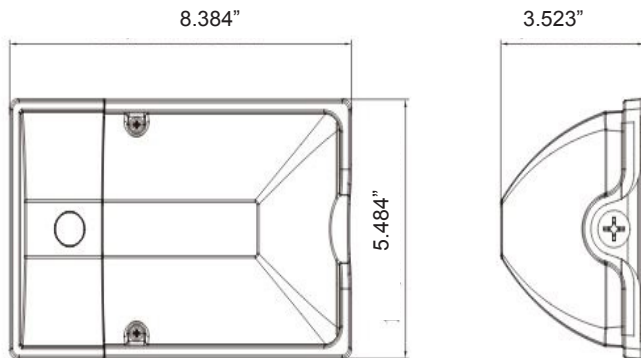

Remove lens and reflector, mount to desired surface and make electrical connections.



Replace the reflector using existing slotted mounts.



Replace lens and turn on the power.

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE