

### APPLICATIONS

Perfect for security, entry ways, stairways, storage and perimeter areas as well as residential exteriors.

### FEATURES & BENEFITS


- ◆ Sealed die-casting profile for outdoor applications
- ◆ Consumes 17W to replace 120W Incandescent, 25W to replace 50W HID
- ◆ Lumen output from 1900-2700lm
- ◆ Supports direct wall mounting and J-Box mounting, with 1/2 inch entry at the bottom
- ◆ Built-in UL class 2 driver
- ◆ Optional 120V/277V photocell
- ◆ UL Wet Location listed



### ORDERING DATA

EXAMPLE: MISMRWPKLED17MV50

MISMRWPK	LED		MV	50	
Series	Gear	Wattage / Lumens	Driver	Color Temp	Options
MISMRWPK LED Wall Mount	LED	17 17 Watts 2000 Lumens 25 25 Watts 2700 Lumens	MV 120-277VAC Multivolt	30 3000K 50 5000K	PC Photocell

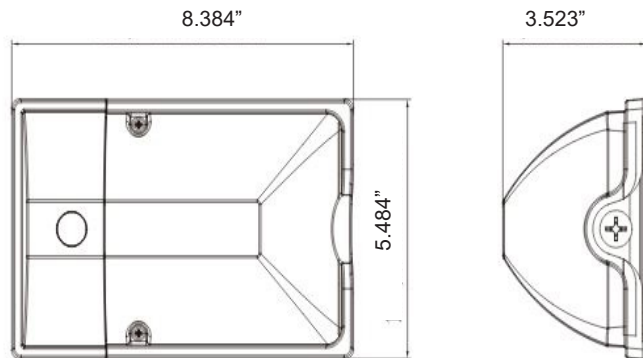

### 1.2.3 Easy Installation



① Remove lens and reflector, mount to desired surface and make electrical connections.

② Replace the reflector using existing slotted mounts.

③ Replace lens and turn on the power.

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE