

FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C (-40°F) to +50°C (122°F)
- ◆ Estimated 50,000 Hrs L₇₀
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic diffuser
- ◆ Post top version fits most 3 inch diameter posts (not included)
- ◆ UL Listed for wet locations
- ◆ Energy Star Listed in wall and long tail versions
- ◆ 5 year warranty




ORDERING DATA


EXAMPLE: MKRPWHLED13D120WH30

MKR	LED	13	D120					
Series	Mount	Lens	Gear	Wattage / Lumens	Driver	Finish	Color Temp	Options
MKR	P Post Top W Wall Mount L Wall Mount Long Tail	WH White CL Clear	LED	13 13 Watts 1000 Lumens <small>Estimated from LED Source</small>	D120 120VAC Triac Dimmable	WH White BK Black	30 3000K 40 4000K	PC Photocell* <small>*Photocell Not Available on Post Top</small>


Long Tail Wall Mount

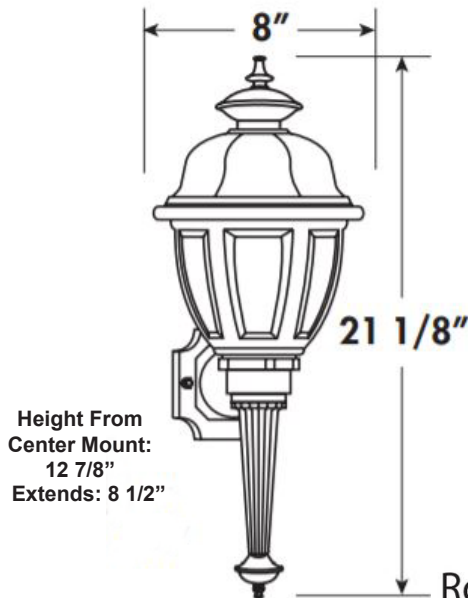

Wall Mount

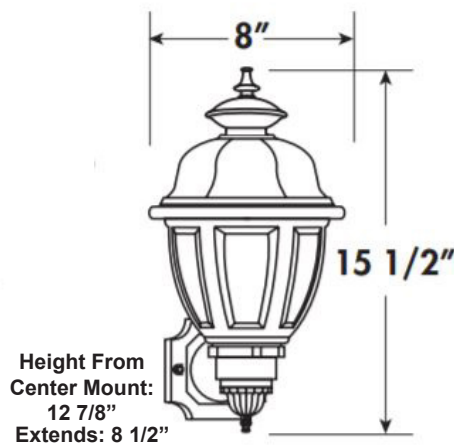

Post Top

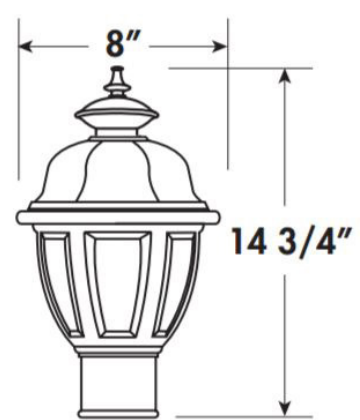

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE