

### FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C (-40°F) to +40°C (105°F)
- ◆ Estimated 50,000 HRS L<sub>70</sub>
- ◆ Thermally protected LED array
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ cUL<sub>us</sub> Listed for damp location
- ◆ Min CRI > 80




### ORDERING DATA

EXAMPLE: MOCL10LED13D120WH30

Series	Size	Gear	Wattage/Driver*	Housing Color	Color Temp
<b>MOCL</b> Outdoor Octagon	<b>10</b> 10 inches	<b>LED</b>	<b>13D120</b> 13Watt D120Volt Triac Dimmable <b>14D120</b> 14Watt D120Volt Triac Dimmable <b>23D120</b> 23Watt D120Volt Triac Dimmable *consult for Lumen packages	<b>WH</b> White <b>BK</b> Black	<b>30</b> 3000K <b>40</b> 4000K

Series	Size	Socket	Lamp Type	Housing Color	Color Temp
<b>MOCL</b> Outdoor Octagon Series	<b>10</b> 10 inches	<b>INC</b> Incandescent	<b>LED</b> 10Watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable	<b>WH</b> White <b>BK</b> Black	<b>27</b> 2700K <b>40</b> 4000K

### DIMENSIONS

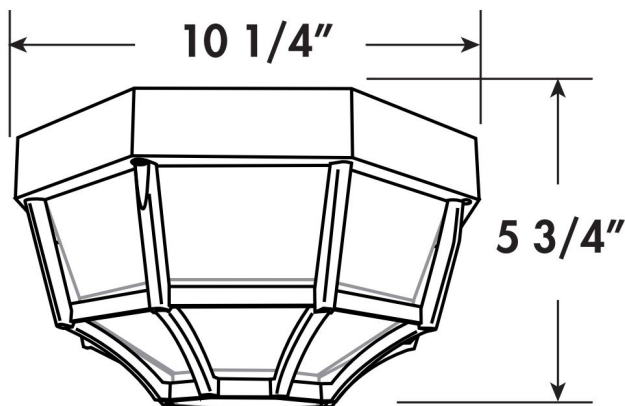

Dimensions and specifications subject to change without notice.



L I G H T I N G

◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 100, Jessup, MD 20794

CAT#

JOB NAME

TYPE