

APPLICATIONS

Heavy duty die-cast construction with modular LED light engine design, this slim-profile luminaire is perfectly used in parking garage, canopy or high ceilings. It provides an easy installation with quick mount structure for contractors to work safely and easily in the confined space areas.

FEATURES & BENEFITS

- ◆ Solid construction die-cast aluminum body
- ◆ UV stabilized powder coated finish
- ◆ Unique quick mount design
- ◆ Compatible with 1-10V dimming
- ◆ UL and cUL listed for wet locations
- ◆ Optional photo control and motion sensor capability
- ◆ Adjustable optics
- ◆ Finish - Gray



***Very Limited Stock**
****While Supplies Last**



SPECIFICATIONS

MA	Input Voltage	CRI	Starting Temp	Equivalent
900MA	120-277V	70+	-40°C	150W MH

ORDERING DATA

EXAMPLE: MPGLLED55MVGR50

MPGL	LED	55	MV	GR	50	
Series	Gear	Wattage/Lumens	Driver Type	Finish	Color Temp	Option
MPGL LED Parking Garage	LED	55 55 Watts 4310 Lumens	MV Multi-volt 120-277V	GR Gray	50 5000K	OS Occupancy Sensor PC120 Photocell 120V PC277 Photocell 277V

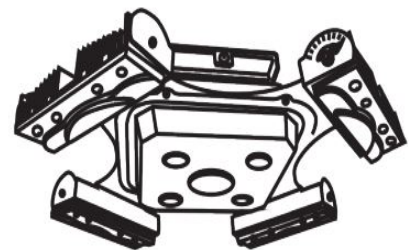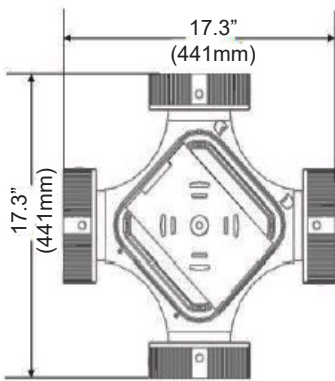

Different colors are available with 4 week lead time.

**DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using single representative test fixture. Actual production units may vary from the values reported here by up to 10%



IP65

Dimensions and specifications subject to change without notice.

CAT#	
JOB NAME	TYPE