

FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C to +40°C
- ◆ L₇₀ > 50000 hrs.
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic diffuser
- ◆ Post top version fits most 3 inch diameter posts (not included)
- ◆ cUL_{US} Listed for wet locations



Post Top

Wall Mount

Wall Mount Long Tail

ORDERING DATA

EXAMPLE: MPRP-LED13D120WHWH40

MPR		LED		13		D120							
Series	Mount	Gear	Wattage / Lumens		Driver	Finish	Lens	Color Temp		Options			
MPR Princeton Collection	P Post Top W Wall Mount L Wall Mount Long Tail	LED	13	13 Watts 1000 Lumens	D120 120VAC Triac Dimmable	WH White BK Black	WH White CL Clear	30 3000K 40 4000K	PC Photocell*		*Photocell Not Available on Post Top		

ORDERING DATA

EXAMPLE: MPRWINCLEDWHCL40

MPR		LED										
Series	Mount	Socket	Lamp Type (Optional)		Finish	Lens	Color Temp (Optional)		Options			
MPR Princeton Collection	P Post Top W Wall Mount L Wall Mount Long Tail	INC* Incandescent *60W max	LED	9.5 watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable	WH White BK Black	WH White CL Clear	30 3000K 40 4000K	PC Photocell*		*Photocell Not Available on Post Top		

Dimensions and specifications subject to change without notice.




◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#			
JOB NAME		TYPE	


DIMENSIONS

Wall Mount Long Tail

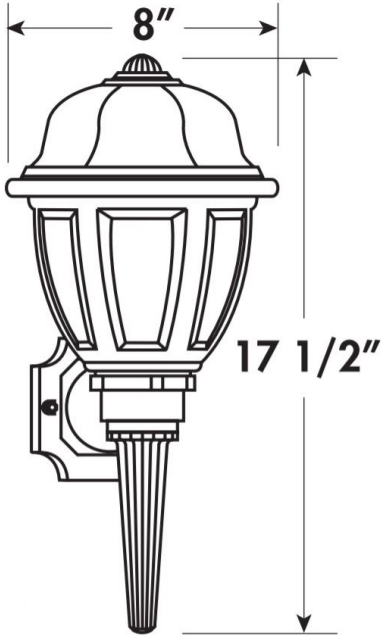


Height From
Center Mount: 10^{7/8}"

Wall Mount

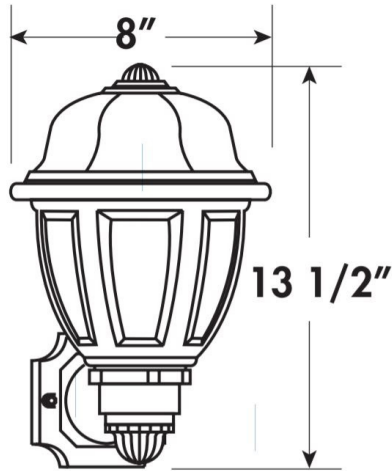

Height From
Center Mount: 10^{7/8}"

Post Top

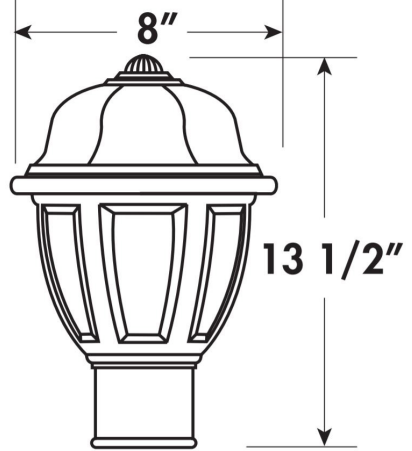

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	