

### APPLICATIONS

The MWCED cylinders are wet location and IP65 rated for outdoor use. The wall mount cylinders come in two versions: down light only and up & down light. These fixtures are designed to operate in environments between -22°F to 104°F (-30°C to 40°C), and are excellent for applications where a harsh environment is concerned.

### FEATURES & BENEFITS

- ◆ All aluminum construction, powder coat painted in white, black, or silver finish for harsh weatherproof applications
- ◆ Wall fixture mounts directly on surface using appropriate anchor bolts or screws (not included)
- ◆ Ceiling/Pendant fixture mounts directly onto a ceiling J-box
- ◆ Min CRI 80
- ◆ IP65 Rated
- ◆ cCSA<sub>US</sub> listed for wet locations
- ◆ 3 year warranty on housing
- ◆ 5 year warranty on LED module



### WALL ORDERING DATA

EXAMPLE: MWCED4LEDD15D120BK830

MWCED4	LED					D120				
Series	Gear	Up-Light/Down-Light	Wattage/Lumens		Driver	Finish		CRI	Color Temp	
MWCED4 Wall Cylinder	LED	<b>D</b> Downlight Only <b>1U1D</b> 50% Uplight 50% Downlight	<b>Downlight Only</b> <b>15</b> 15 Watts 1190 Lumens <b>20</b> 20 Watts 1415 Lumens <b>30</b> 30 Watts 2110 Lumens <b>Up and Down Light</b> <b>30</b> 30 Watts 2380 Lumens <b>40</b> 40 Watts 2830 Lumens <b>60</b> 60 Watts 4220 Lumens		<b>D120</b> 120VAC Triac Dimmable	<b>BK</b> Black <b>SI</b> Silver <b>WH</b> White	<b>8</b> 80 CRI <b>9</b> 90 CRI	<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K		

### CEILING/PENDANT ORDERING DATA

EXAMPLE: MWCED4P-LEDS315D120BK830

MWCED4	LED					D120				
Series	Gear	Pendant Style	Wattage/Lumens		Driver	Finish		CRI	Color Temp	
MWCED4	LED	(Blank) Standard Pendant <b>S</b> Swivel Mount Pendant	<b>Downlight Only</b> <b>15</b> 15 Watts 1190 Lumens <b>20</b> 20 Watts 1415 Lumens <b>30</b> 30 Watts 2110 Lumens		<b>D120</b> 120VAC Triac Dimmable	<b>BK</b> Black <b>SI</b> Silver <b>WH</b> White	<b>8</b> 80 CRI <b>9</b> 90 CRI	<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K		
<b>Mounting</b>		<b>Pendant or Cable/Cord Length</b>		<b>120V Approved Dimmers</b>						
<b>P</b> Pendant <b>C</b> Ceiling	<b>Pendant Lengths</b> <b>3</b> 3 inches <b>6</b> 6 inches <b>12</b> 12 inches <b>18</b> 18 inches <b>24</b> 24 inches <b>36</b> 36 inches <b>48</b> 48 inches <b>Cable and Cord Lengths</b> <b>C12</b> 12 inches <b>C24</b> 24 inches <b>C36</b> 36 inches <b>C50</b> 50 inches <b>C72</b> 72 inches <b>C120</b> 120 inches		<b>*Lutron:</b> Skylark S-600 : MRF2-6DN-120 : MACL-153M : DVLV-600P : SELV-300P : CTCL-153P : DVELV-303P : DVCL-153P <b>*Leviton:</b> D600R, Acenti: Ate06, Trimatron #705W <b>*Cooper Devine</b> incandescent dimmer 600W <b>*Pass&amp;Seymour</b> harmony incandescent 600W							



Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME



TYPE

#### DIMENSIONS


**Wall Mount  
Downlight Only**

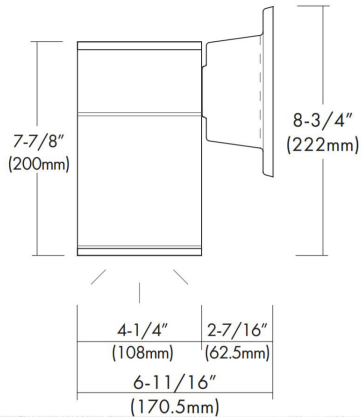



**Wall Mount  
Up and Down Light**

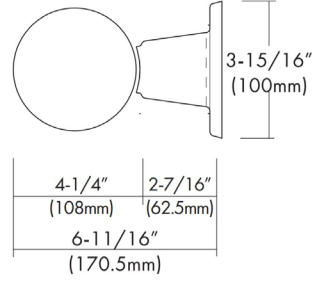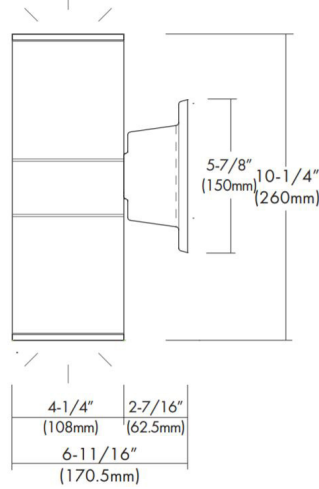


**Ceiling Mount**

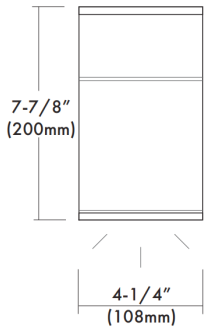

**Pendant Mount**

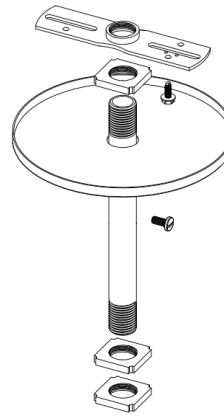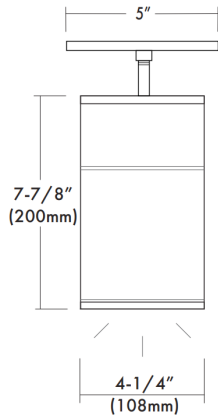

(Standard Pendant)

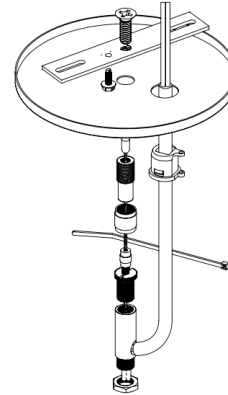

(Pendant Cable and Cord)

Dimensions and specifications subject to change without notice.

