

APPLICATIONS

Distinctive architecturally styled round and wedge shapes. Designed for doorways, interior and exterior walls and column mounts.

FEATURES & BENEFITS

- ◆ ADA Compliant
- ◆ Ability to accept side access conduit
- ◆ 1 complete fixture per carton, individual fixture cartons master packed - 4 per master carton
- ◆ Clear acrylic lens
- ◆ Ability to use Photocell and 10KVA surge suppressor




ORDERING DATA

EXAMPLE: MWPKAWS-LED13MV40BZ

MWPKA


Series	Gear	Wattage & Lumens	Driver Type	Color Temp	Housing	Options
MWPKA	LED	13 13 watts	MV Multivolt	50 5000K	BZ Bronze	PC120 120V Photocell PC277 277V Photocell SP120 120V Surge Protector SP277 277V Surge Protector PCSP120 120V Photocell and 120V Surge Protector
RS Round 8.47 x 8.47 x 3.95						
WS Wedge 6.76 x 6.83 x 3.95						

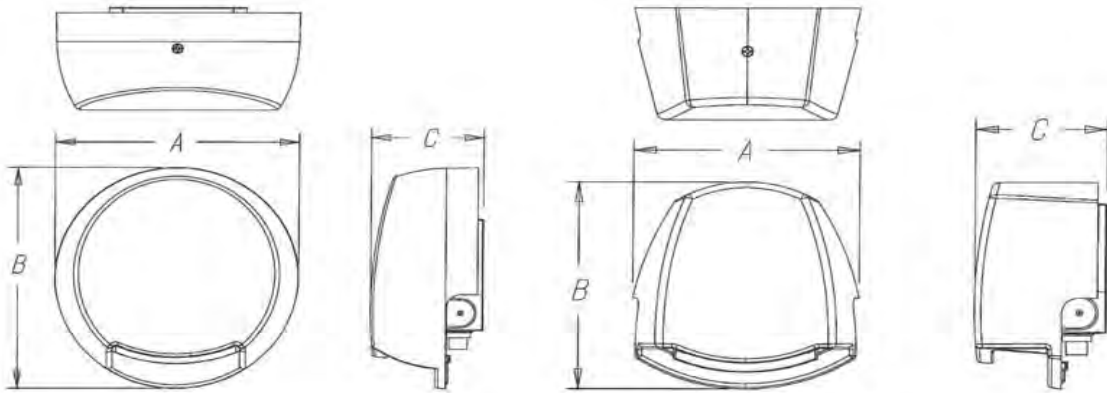

Model	A	B	C	Lumens
Round	8.47"	8.47"	3.95"	835
Wedge	6.76"	6.83"	3.95"	890

Dimensions and specifications subject to change without notice.

Mini Pack Preliminary Photometric Data (6/2015)

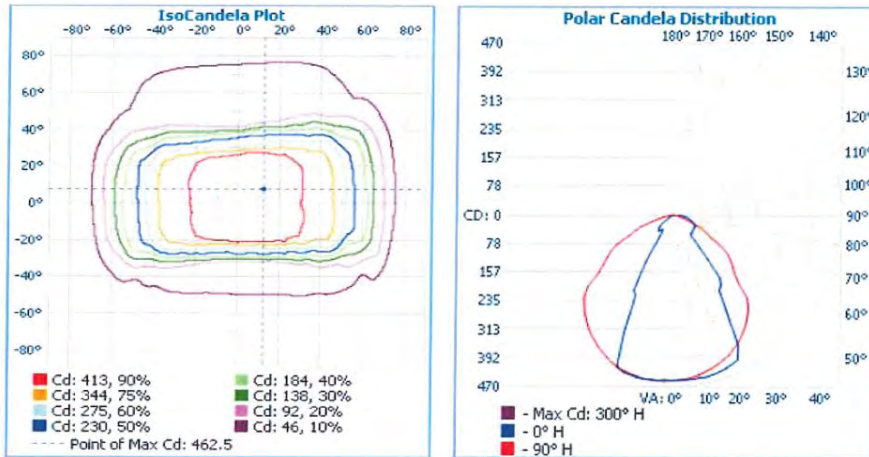

IsoCandela Plot

Polar Candela Distribution

RCC%	80				70				50			30			10			0
	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.10	1.06	1.03	.99	1.08	1.04	1.01	.88	1.00	.97	.95	.96	.94	.92	.93	.91	.89	.87
2	1.02	.95	.89	.84	1.00	.93	.88	.77	.90	.85	.81	.87	.83	.80	.84	.81	.78	.76
3	.95	.85	.78	.73	.92	.84	.77	.68	.81	.75	.71	.78	.74	.70	.76	.72	.69	.67
4	.88	.77	.70	.64	.86	.76	.69	.60	.74	.67	.62	.71	.66	.62	.69	.65	.61	.59
5	.81	.70	.62	.56	.80	.69	.62	.54	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6	.76	.64	.56	.50	.74	.63	.56	.49	.61	.55	.50	.60	.54	.49	.58	.53	.49	.47
7	.71	.59	.51	.45	.69	.58	.51	.44	.57	.50	.45	.55	.49	.45	.54	.48	.44	.43
8	.66	.54	.46	.41	.65	.54	.46	.40	.52	.46	.41	.51	.45	.41	.50	.45	.40	.39
9	.62	.50	.43	.36	.61	.50	.42	.37	.49	.42	.37	.48	.42	.37	.47	.41	.37	.35
10	.59	.47	.39	.35	.58	.46	.39	.34	.45	.39	.34	.44	.38	.34	.43	.38	.34	.32

Test Results – Flux Distribution – Zonal Lumen Summary		
The following table depicts the zonal lumen distribution for the sample:		
Zone	Lumens	% Total
0-10	43.2	4.9%
10-20	126.6	14.5%
20-30	184.3	21.1%
30-40	178.2	20.4%
40-50	142.0	16.2%
50-60	97.4	11.1%
60-70	58.4	6.7%
70-80	29.8	3.4%
80-90	14.3	1.6%
Total	874.2 LUMENS	100%
Zonal Lumens Summary		
Zone	Lumens	% Luminaire
0-30	354.1	40.5%
0-40	532.3	60.9%
0-60	771.7	88.3%
60-90	102.4	11.7%
0-90	874.2	100%

Dimensions and specifications subject to change without notice.