

APPLICATIONS

The PTRRLO-LED and PTRRLE-LED Reveal Large Reveal Post Tops are available in a Type V distribution designed to replace HID lighting systems up to 1000W MH or HPS. The fixtures mount to a pole top tenon. Typical area lighting applications include parking areas, walkways, and street lighting applications. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements.

FEATURES & BENEFITS

- ◆ Min CRI 80
- ◆ $L_{70} > 362000$ hrs. at 25°C
- ◆ Accommodates "P3" 2^{7/8}" O.D. x 4" Tenons
- ◆ THD < 20%, PF > 0.90
- ◆ Standard 6 kV surge protection
- ◆ Clear or LumaLens opal array lens to seal LED array
- ◆ Black powdercoat finish over a chromate conversion coating
- ◆ IP66 sealed LED compartment
- ◆ cCSA_{US} listed for wet locations
- ◆ 5 year warranty for -40°C to +50°C




ORDERING DATA

EXAMPLE: PTRRLO-LED186DMVBK50

PTRRL	LED	186	DMV	Array Lens	BK	Color Temp
Series PTRRL Reveal Large Round Post Top	Gear LED	Wattage/Lumens 186 190 Watts ¹	Driver DMV 120-277VAC 0-10V Dimmable to 10%	Array Lens (Blank) Clear Lens O Opal Lens ²	Finish³ BK Black	Color Temp 30 3000K 40 4000K 50 5000K
Type O Open E Enclosed		¹ See Lumen chart below		² Only available w/ open post top	³ Consult for other finish options	
						Options SF Single Fuse DF Double Fuse SP Surge Protection SSM Microwave Sensor ² R3 3-pin twist lock photocell receptacle R7 7-pin ANSI C136.41 - 2013 twist lock photocell receptacle

Lumen Chart								
	4000K	B	U	G	5000K	B	U	G
PTRRLO w/ Clear Lens	18,818 Lumens	4	2	2	19,174 Lumens	3	2	2
PTRRLO w/ Opal Lens	16,089 Lumens	3	2	2	16,394 Lumens	3	2	2
PTRRLE w/ Clear Lens	16,101 Lumens	3	2	2	16,405 Lumens	3	2	2

DIMENSIONS

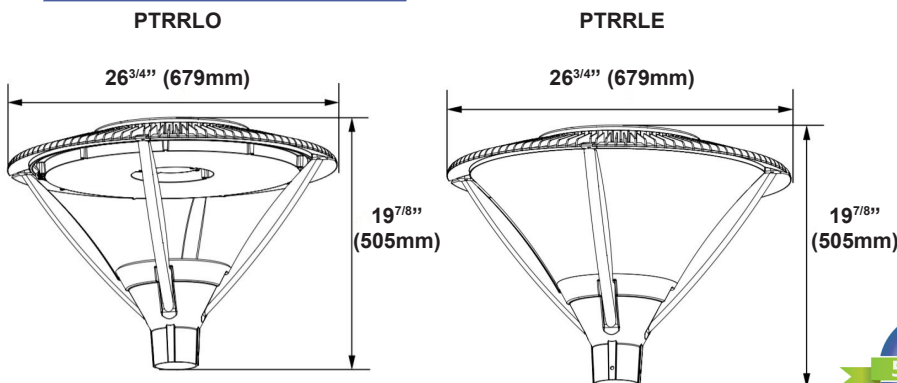

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	