

APPLICATIONS

Low profile dual basket RDISD is ideal for shallow plenum spaces. Specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment.

FEATURES & BENEFITS

- ◆ Direct/indirect mimics "sky light" appearance
- ◆ Matte white reflective surfaces for soft, uniform light distribution
- ◆ For use in recessed inverted T-Bar or grid ceilings
- ◆ Every fixture is individually tested
- ◆ IC Rated
- ◆ 5 Year Warranty
- ◆ _cETL_{us} listed for damp location up to 67 watts



SPECIFICATIONS

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers snap into place with no tools required for removal.

ORDERING DATA

EXAMPLE: RDISD22-LED28FRDMV40

RDISD		LED									
Series	Size	Gear	Wattage/Lumens		Lens/Basket		Driver		Color Temp		Options
RDISD	22 2x2	LED	2x2		FR Frosted	DMV 120-277V Multivolt	30 3000K	EM	10W Emergency		
LED Low	Nominal		20 20 Watts 2060 Lumens	PF Perforated	0-10V Dimmable	35 3500K		Back-up			
Profile Dual	24 2x4		24 24 Watts 2620 Lumens	Basket w/Inlay	Multivolt	40 4000K	SDMV	~1300 Fixture Lumens			
Basket	Nominal		28 28 Watts 2900 Lumens	RL Ribbed Linear	Step dimming	50 5000K	DHV	5W Emergency			
			30 30 Watts 3100 Lumens		0-10V Dimming		D347V	Back-up			
			35 35 Watts 3400 Lumens		347VAC		D120	~650 Fixture Lumens			
			42 42 Watts 4000 Lumens		0-10V Dimming		D277	10W Emergency			
			2x4		120VAC			Back-up			
			28 28 Watts 3100 Lumens		Triac Dimming			~900 Fixture Lumens			
			32 32 Watts 3520 Lumens		277VAC			6' 3 Wire Flexible Conduit			
			48 48 Watts 5300 Lumens					6' 5 Wire Flexible Conduit (For EM)			
			57 57 Watts 5900 Lumens					6' 5 Wire Flexible Conduit (For DMFVID)			
			60 60 Watts 6240 Lumens					Surface Mount			
			62 62 Watts 6700 Lumens								
			72 72 Watts 6800 Lumens								



Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME


TYPE

DIMENSIONS

TOP VIEW 2x2

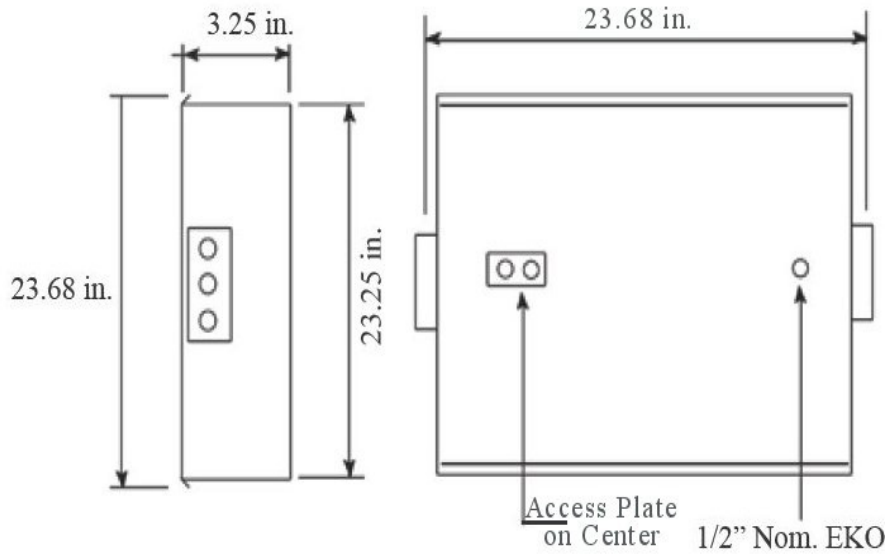

TOP VIEW 2x4

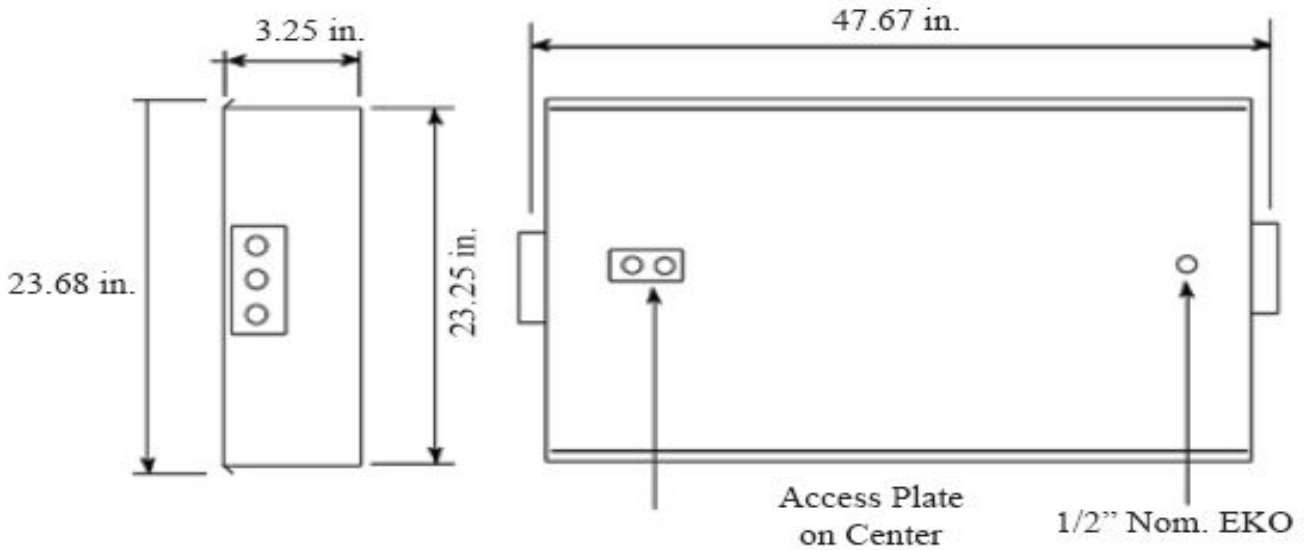

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE