

APPLICATIONS

This kit is designed to convert most recessed fluorescent 1x4, 2x2 and 2x4 troffers and parabolics to long-life and efficient LED technology. These kits provide everything required to enhance the performance and energy savings of your recessed fixture while minimizing labor, clean up and expense. Kits include high-reflectance reflector with driver, LED boards and tek screws for easy assembly. Kits install with simple hand tools in minutes.

FEATURES & BENEFITS

- ◆ Constant Current LED Driver
- ◆ Input Voltage: 120-277V AC
- ◆ Input Frequency: 50/60Hz
- ◆ Reflectors are precision formed and high performance
- ◆ ETL_{us} recognized as retrofit
- ◆ DLC listed in certain models

SPECIFICATIONS

The RKT-LED retrofit kits mount easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The driver is attached to the backside of the reflector.



ORDERING DATA


EXAMPLE: RKT24-LED48DMV40

RKT		LED		Driver		Color Temp		Options			
Series	Size	Gear	Wattage/Lumens*								
RKT Retrofit Kit	14	1x4 Troffer/Parabolic	LED	Standard 1x4		DMV	120-277V Multivolt	30	3000K	SS	Integrated Sensor
	22	2x2 Troffer/Parabolic		35	35 Watt 4320 Lumens		0-10V Dimmable	35	3500K		
	24	2x4 Troffer/Parabolic		48	48 Watt 5680 Lumens		Step dimming	40	4000K		
				57	57 Watt 6500 Lumens	Multivolt	50	5000K			
				Standard 2x2		DHV					
				20	20 Watt 2300 Lumens	347-480VAC					
				24	24 Watt 2800 Lumens	0-10V Dimming					
				28	28 Watt 3200 Lumens	347VAC					
				35	35 Watt 4100 Lumens	0-10V Dimming					
				45	45 Watt 4470 Lumens	D347					
				Standard 2x4		Triac Dimming					
				35	35 Watt 4320 Lumens	120VAC					
				48	48 Watt 5680 Lumens	D120					
				57	57 Watt 6500 Lumens	Triac Dimming					
						D277					
						277VAC					



DLC Listed	
RKT22-LED20DMVxx	xx=30,35,40,50
RKT22-LED24DMVxx	xx=30,35,40,50
RKT22-LED28DMVxx	xx=30,35,40,50
RKT22-LED35DMVxx	xx=30,35,40,50
RKT22-LED45DMVxx	xx=30,35,40,50
RKT24-LED35DMVxx	xx=30,35,40,50
RKT24-LED48DMVxx	xx=30,35,40,50
RKT24-LED57DMVxx	xx=30,35,40,50

DIMENSIONS

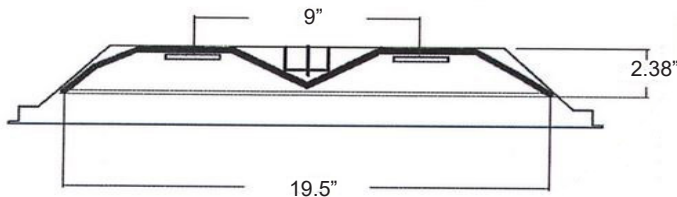

RECOGNIZED COMPONENT



MOBERN

Dimensions and specifications subject to change without notice.

Intertek

L I G H T I N G

◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE