

APPLICATIONS

Specification grade, recessed perimeter elliptical wall wash to highlight wall and shelf mounted goods in commercial and retail environments. Provides uniform VERTICAL surface lighting.

FEATURES & BENEFITS

- ◆ Recessed inverted T-bar ceilings. Grid mount.
- ◆ Perimeter highlight for wall and shelf mounted goods
- ◆ "Silver" full bright reflectors maximize efficiency, light output, and control wall wash distribution
- ◆ IC Rated
- ◆ Access plate to simplify installation
- ◆ Every fixture is individually tested
- ◆ cETL_{us} listed for damp location

SPECIFICATIONS

Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Access plate with wiring knockouts are provided on one side of housing. Ballast is accessed from side, through adjacent ceiling tile. Premium, full specular reflectors at sides and ends create a professional finish and control the wall wash lighting distribution.




ORDERING DATA

EXAMPLE:RWW24-LED24DMV30

RWW						
Series	Size	Gear	Wattage & Lumens	Driver Type	Color Temp	Options
RWW	24 24 in 48 48 in	LED	24 in 24 24 Watts 2400 Lumens 35 35 Watts 3400 Lumens 48 in 24 24 Watts 2400 Lumens 48 48 Watts 4800 Lumens 57 57 Watts 5700 Lumens 72 72 Watts 7200 Lumens	DMV 120-277VAC 0-10V Dimmable SDMV Step dimming 120-277VAC 100%-40% DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	30 3000K 35 3500K 40 4000K 50 5000K	WP 6ft 3 wire 18 gauge whip WP10 6ft 4 wire 18 gauge whip **Call for additional options

DIMENSIONS

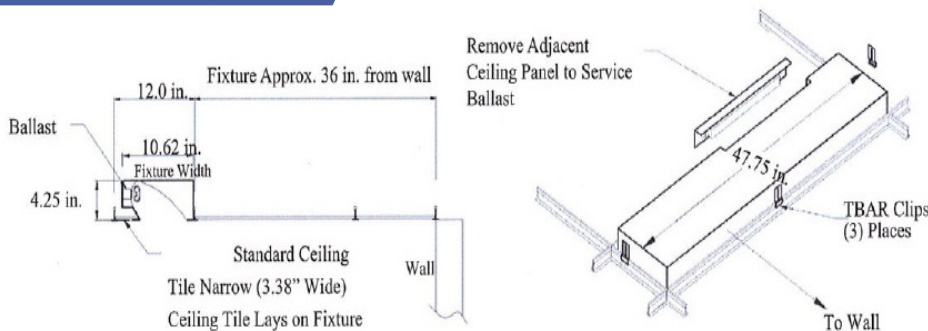

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	