

### APPLICATIONS

Mobern's SALSR area light is a highly efficient, long life, low profile wet location rated luminaire that provides uniform illumination that is perfect for auto dealerships, parking lots, walkways, roadways, campuses, facade lighting, grocery stores and other public areas.

### FEATURES & BENEFITS

- ◆ One piece die-cast aluminum housing with outstanding corrosion protection
- ◆ UV resistant polycarbonate optical lens
- ◆ Suitable for mounting heights from 26-40' in area lighting applications
- ◆ Various distribution patterns including Type III, IV, and V
- ◆ Round pole and square pole mounting, direct wall mounting, slip fitter and trunnion mounting options
- ◆ Long lasting L70 ≥ 100,000 hrs
- ◆ IP66 rated
- ◆ Operated temperature range: -40°C to 45°C (-40°F to 113°F)
- ◆ Type III distribution standard
- ◆ <sup>C</sup>UL<sub>US</sub> Wet Location listed
- ◆ Bronze finish



16 Inch



25 Inch



### ORDERING DATA


EXAMPLE: SALSR16-LED150DMV50

SAL			LED		Driver		Color Temp		Options	
Series	Size	Distribution	Gear	Wattage/Lumens*	DMV	DHV	40	50	PC	OS
SALSR Area Light	16	15.79 inch	(Blank) Type 3	<b>16" size only</b>	120-277VAC	0-10V dimmable	4000K		PC	Photocell
	25	25.04 inch	T4 Type 4 T5 Type 5	150 150 Watts 19500 Lumens 200 200 Watts 26000 Lumens	347-480VAC	0-10V dimmable	5000K		OS	Occupancy Sensor
				<b>25" size only</b>						
				250 250 Watts 33000 Lumens 300 300 Watts 39000 Lumens						

\*Lumens at 40K and Type 3 distribution

### Accessories

- SAL-SQ-ARM** Square pole mntg arm for SALSR series BRZ
- SAL-RD-ARM** Round pole mntg arm for SALSR series BRZ
- SAL-SF** Slip fitter mntg for SALSR series BRZ
- SAL-WALL-ARM** Wall mntg for SALSR series BRZ

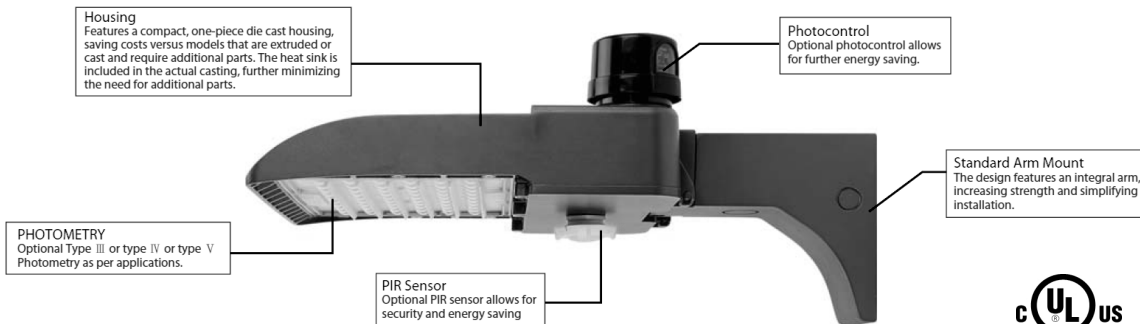

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME


TYPE

### DIMENSIONS


**Slipfitter Mount(150W&200W)**

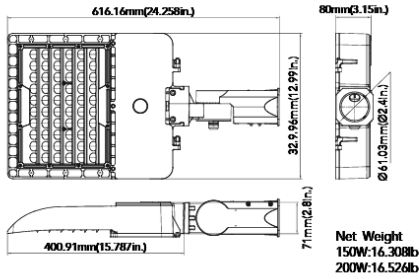


**Pole Mount(150W&200W)**

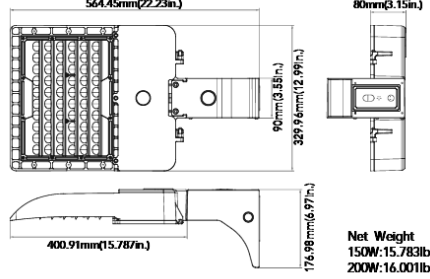


**Wall Mount(150W&200W)**

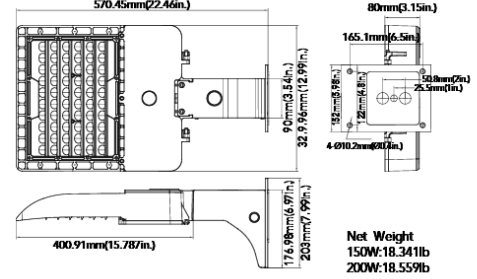


**Slipfitter Mount(250W&300W)**

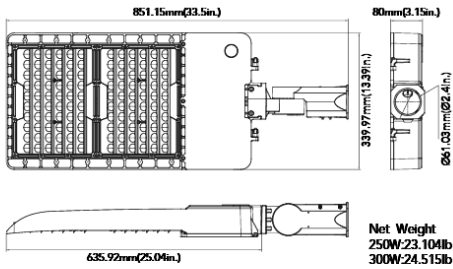

**Pole Mount(250W&300W)**

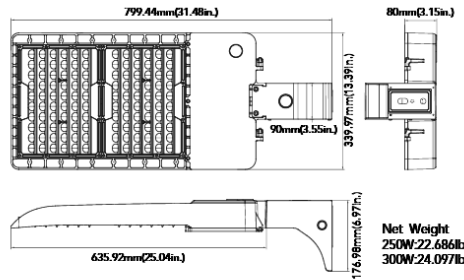

**Wall Mount(250W&300W)**

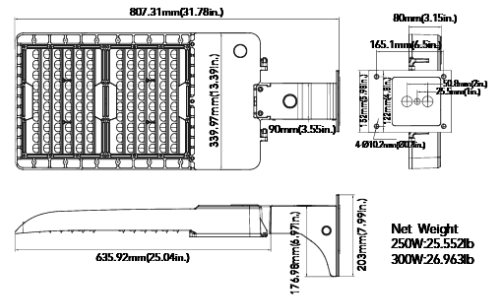

### SAL-SQ-ARM SAL-RD-ARM



Arm Mount (4" and 5" Square & Round Poles)  
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installation.

### SAL-SF






Slipfitter Mount  
An optional cast aluminum mast arm adapter secures fixture head to nominal 2" (2-3/8" O.D. pipe size) horizontal tenon arm.

### SAL-WALL-ARM



Wall Mount  
Wall mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting.

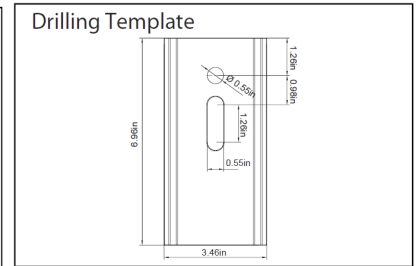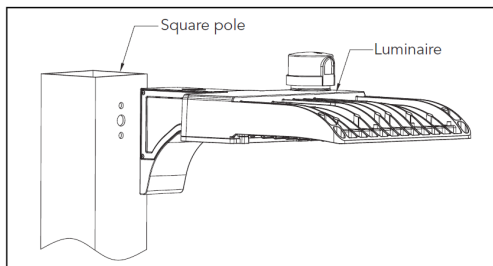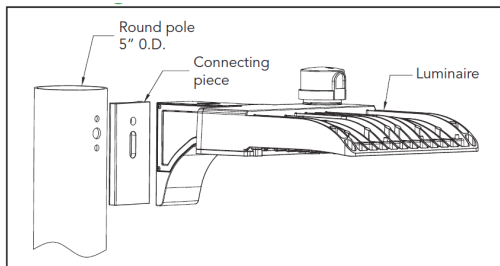

Dimensions and specifications subject to change without notice.



800-444-WATT ♦ www.mobern.com ♦








8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE

### EPA OF AREA LIGHT

Item							
	1	2 @90°	2 @120°	2@180°	3 @90°	3 @120°	4 @90°
150W/200W	0.4418	0.7145	0.8813	0.8836	1.0548	1.0135	1.0548
250W/300W/350W	0.5614	0.8471	1.105	1.1228	1.294	1.2503	1.294

Dimensions and specifications subject to change without notice.

