

APPLICATIONS

This graceful direct/indirect solution creates a bold luminaire, while providing a comfortable atmosphere. Wide winged reflectors effectively direct light, while adding a soft glow and presence to the fixture. A gentle up-lighting effect creates a distinctive look for task or general applications. For use in indoor applications where low glare, high quality and ease of installtion are required: office areas, retail stores, class rooms, corridors.

FEATURES & BENEFITS

- ♦ Single, basket shaped perforated metal shield
- Translucent, opal white acrylic diffuser overlay
- Clean appearance. No exposed fasteners.
- Easy re-lamping and re-ballasting
- Surface, stem or chain mountable
- Suitable for continuous raceway and row mounting
- Available with 2 or 3 lamps
- ♦ Uses T5, T8 lamps

SPECIFICATIONS








Shields are perforated for direct and indirect illumination and contain a opal white acrylic overlay diffuser for visual comfort. Indirect reflectors are precision formed and contoured to provide a soft, low-glare, indirect illumination, while maintaining high-efficiency and a wide uniform light distribution. Mounting holes are provided. Knock-outs are provided for stem mounting. Mounts over electrical junction box. Die and brake-formed, heavy gauge steel housing assembly. Die-formed, perforated cold rolled steel shielding. Metal shielding flexes over mounting studs on housing, for easy installation and re-lamping. White polyester powder painted visible surfaces. Rotary lampholders ensure positive lamp retention.


ORDERING DATA


Item Number	Dimensions (LxWxH)	Lamping
SDI114232PFMV	48" x 14.30" x 4.87"	2-F32T8
SDI14254PFMV	48" x 14 30" x 4 87"	2-F54T5HO

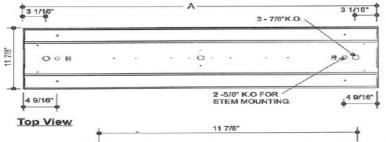

MODEL	NOMINAL LENGTH	Α
1x4	48"	48"
2x4		
2x2	24	24

EXAMPLE: SDI14232PFMV





Dimensions and specifications subject to change without notice.







800-444-WATT → www.mobern.com →
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

JOB NAME

TYPE

End Views