

APPLICATIONS

The SKY Series offers the look and feel of a fluorescent luminaire - subtle soft direct elements, interest and depth across the ceiling plane - with a contemporary look that blends with today's commercial spaces. Suitable for offices, hospitals, schools, etc. Suitable for use in standard 15/16" inverted T-bar grid ceilings.

FEATURES & BENEFITS

- ◆ High performance optical engine delivers main beam focus through the integrated acrylic lens
- ◆ Linear ribbed acrylic lens with Lumieo® overlay manages the balance of efficiency and aesthetics
- ◆ Linear arrayed LED modules provide diffused and effective illumination
- ◆ IC Rated
- ◆ _cETL_{us} listed for damp locations up to 67 watts



SPECIFICATIONS

Low profile troffer body housing with white enamel finish. High reflectance optical engine. Linear ribbed acrylic lens with Lumieo®. Recessed troffer fixture body assembly in 2'x2' and 2'x4' size.

ORDERING DATA

EXAMPLE: SKY22LED20DMV30

SKY		LED								
Series	Size	Gear	Wattage / Lumens		Driver		Color Temp		Options	
SKY	22 2x2	LED	2x2		DMV	120-277V Multivolt	30	3000K	EM	10W 1300 Lumen
LED 2x2 - 2x4 Troffer	24 2x4		20	20 Watts 2455 Lumens		0-10V Dimmable	35	3500K		Battery backup
			24	24 Watts 3035 Lumens	SDMV	Step dimming	40	4000K	EM5	5W 650 Lumen
			28	28 Watts 3510 Lumens		Multivolt	50	5000K		Battery backup
			32	32 Watts 3935 Lumens	DHV	347-480VAC			EM7	7W 900 Lumen
			36	36 Watts 4190 Lumens		0-10V Dimming				Battery backup
			45	45 Watts 4990 Lumens	D347V	347VAC				
			2x4			0-10V Dimming				
			28	28 Watts 3600 Lumens	D120	Triac Dimming				
			31	31 Watts 4055 Lumens		120VAC				
			35	35 Watts 4560 Lumens	D277	Triac Dimming				
			40	40 Watts 5200 Lumens		277VAC				
			45	45 Watts 5825 Lumens						
			50	50 Watts 6455 Lumens						
			55	55 Watts 6975 Lumens						
			60	60 Watts 7355 Lumens						



DLC Listed Models

SKY22-LED20DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED24DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED28DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED32DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED36DMVxx	xx = Color Temp 30,35,40,50
SKY24-LED28DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED35DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED40DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED45DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED50DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED55DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED60DMVxx (EM)	xx = Color Temp 30,35,40,50



Dimensions and specifications subject to change without notice.




◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	

DIMENSIONS

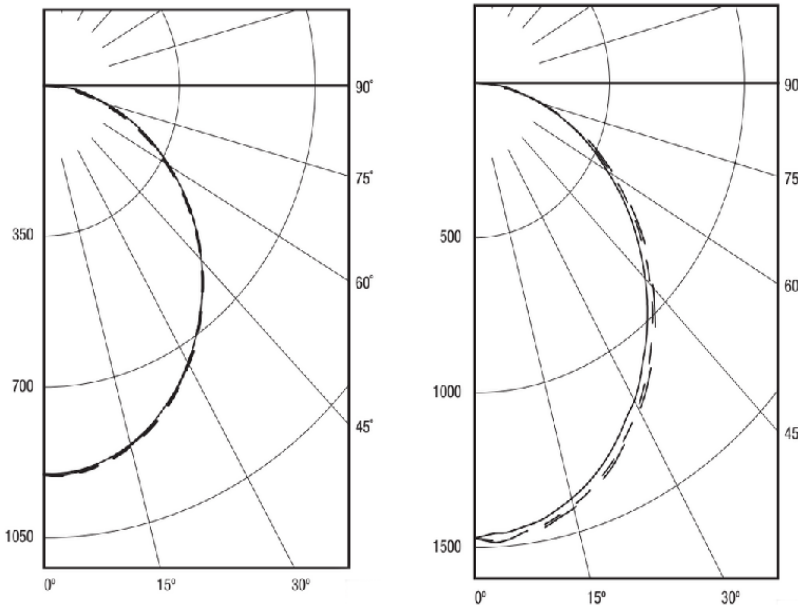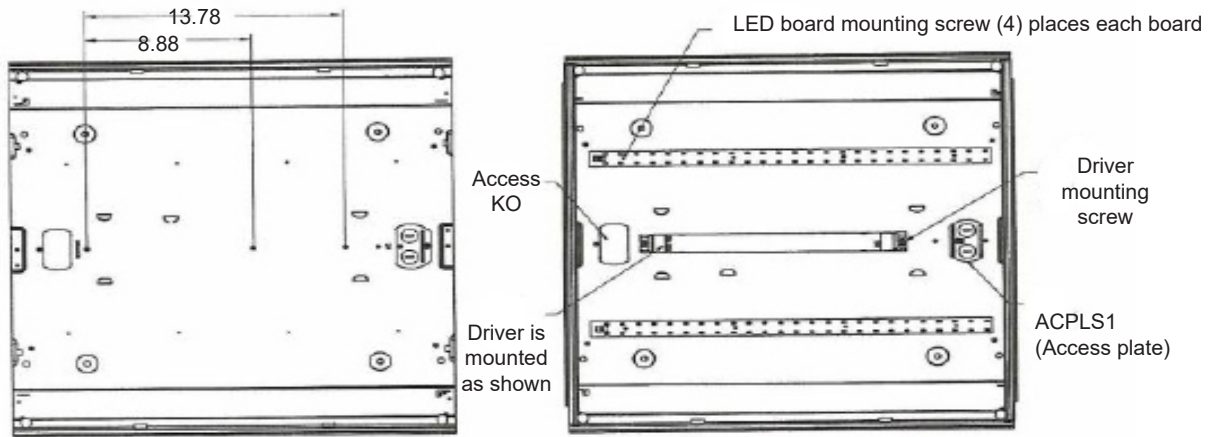

Cross Section

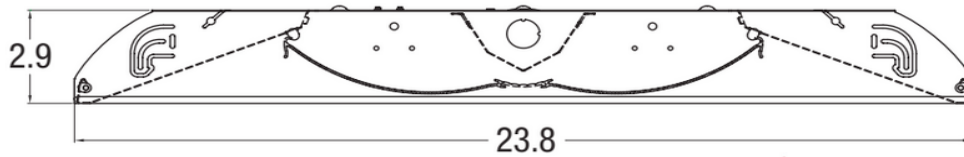

Dimensions and specifications subject to change without notice. ©

