

### APPLICATIONS

Premium surface mounted deep cell parabolic fixture designed for maximum efficiency and visual comfort. Ideal for commercial and industrial buildings requiring general illumination with surface configurations and low glare.

### FEATURES & BENEFITS

- ◆ **P<sup>3</sup> Technology - Post Powder Paint**
- ◆ > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ Clean appearance with no exposed fasteners
- ◆ Low iridescent louver is maintenance free semi-specular anodized aluminum
- ◆ Louver hinges and latches from either side
- ◆ Black reveal provides gap free floating louver appearance
- ◆ Various cell configurations available
- ◆ Pre-lamp available
- ◆ Every fixture individually tested
- ◆ UL listed for damp location



### SPECIFICATIONS

Housing is die-formed from cold rolled steel. A framed parabolic troffer offering improved photometrics over our standard welded surface parabolic fixture. Finish is high reflectance **P3 - Post Powder Paint**. Precision formed anodized semi-specular aluminum louver. Standard nominal 3" deep cell louvers are manufactured using interlocked construction and mitred corners. Louver hinges from either side. Latches use a positive locking cam action and come with matching finish. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. A protective film is provided to protect the and fixture from construction dust. Listed by and bears UL label.

### ORDERING DATA

**EXAMPLE: SPR 22 9 LED 24 DMV 30**

SPR									
Series	Size		Cell #	Gear	Wattage		Driver Type	Color Temp	Options
<b>SPR</b>	<b>14</b>	1x4	<b>8</b>	<b>LED</b>	<b>24</b>	<u>2x2</u>	<b>DMV</b> Dimmable driver	<b>30</b> 3000K	<b>EM</b> Emergency battery pack
Premium	<b>22</b>	2x2	<b>9</b>		24W	2725 Lumens	Factory Installed	<b>35</b> 3500K	10W ~ 1300 Lumens
Surface	<b>24</b>	2x4	<b>12</b>		30W	3300 Lumens	120-277VAC	<b>40</b> 4000K	<b>EM5</b> Emergency battery pack
Parabolic			<b>16</b>		47W	4330 Lumens	Multivolt, 0-10V	<b>50</b> 5000K	5W ~ 650 Lumens
			<b>18</b>			<u>1x4</u>	Dimming		
			<b>24</b>		<b>32</b>	32W			
			<b>32</b>		48W	3600 Lumens			
					<b>48</b>	48W			
						<u>2x4</u>			
					<b>48</b>	48W			
					<b>60</b>	60W			
					<b>85</b>	85W			
						8675 Lumens			



Dimensions and specifications subject to change without notice.




CAT#	
JOB NAME	TYPE

**DIMENSIONS**


**TOP VIEW**

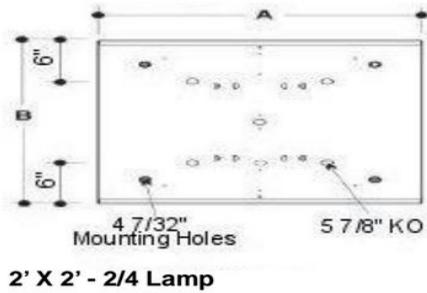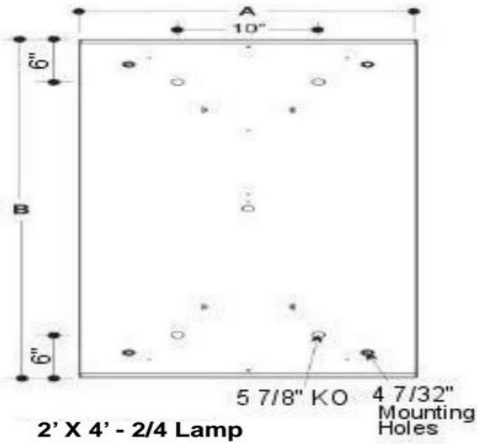

**END VIEW**

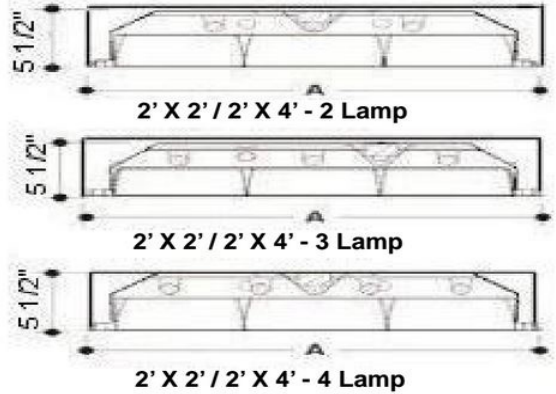

**SIDE VIEW**



MODEL CONFIGURATION	A	B
2' x 2'	24"	24"
2' x 4'	24"	48"



Dimensions and specifications subject to change without notice.

