

APPLICATIONS

The SRDIS LED is a specification grade LED surface mounted direct/indirect center diffuser luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings. Reflected light from matte surfaces providing a softened perforated appearance to the modern office environment.

FEATURES & BENEFITS

- ◆ Direct/indirect provides a low glare light source
- ◆ Matte white reflective surfaces for soft, uniform light distribution
- ◆ Multiple diffuser options available
- ◆ Over 80% efficiency when used with frosted and acrylic diffuser
- ◆ 0-10V dimming driver standard
- ◆ Easy access plate for quick wiring
- ◆ cETL_{us} listed for damp locations



SPECIFICATIONS

Housing is die-formed and embossed code 20 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal. Listed by and bears ETL label.

ORDERING DATA

EXAMPLE: SRDIS22-LED28FRDMV40

| SRDIS | | LED | | Wattage / Lumens | | Diffuser | | Driver ¹ | | Color Temp | |
|--------|----------------------------|------|--|------------------|----------------------|---|----------------------------------|--|--|------------|--|
| Series | Size | Gear | | | | | | | | | |
| SRDIS | 14 1x4 22 2x2 24 2x4 | LED | | | | FR Frosted Lens PF Perforated Basket RL Ribbed Acrylic Lens | DMV 120-277VAC 0-10V Dimmable | 30 3000K 35 3500K 40 4000K 50 5000K | | | |
| | | | | 1x4 | | | | | | | |
| | | | | 28 | 28 Watts 3200 Lumens | | | | | | |
| | | | | 32 | 32 Watts 3620 Lumens | | | | | | |
| | | | | 48 | 48 Watts 5450 Lumens | | | | | | |
| | | | | 57 | 57 Watts 6080 Lumens | | | | | | |
| | | | | 60 | 60 Watts 6430 Lumens | | | | | | |
| | | | | 2x4 | | | | | | | |
| | | | | 28 | 28 Watts 3200 Lumens | | | | | | |
| | | | | 32 | 32 Watts 3620 Lumens | | | | | | |
| | | | | 48 | 48 Watts 5450 Lumens | | | | | | |
| | | | | 57 | 57 Watts 6080 Lumens | | | | | | |
| | | | | 60 | 60 Watts 6430 Lumens | | | | | | |
| | | | | 62 | 62 Watts 6900 Lumens | | | | | | |
| | | | | 72 | 72 Watts 7000 Lumens | | | | | | |
| | | | | 2x2 | | | | | | | |
| | | | | 20 | 20 Watts 2125 Lumens | | | | | | |
| | | | | 24 | 24 Watts 2700 Lumens | | | | | | |
| | | | | 28 | 28 Watts 2980 Lumens | | | | | | |
| | | | | 30 | 30 Watts 3200 Lumens | | | | | | |
| | | | | 35 | 35 Watts 3500 Lumens | | | | | | |
| | | | | 42 | 42 Watts 4080 Lumens | | | | | | |

| Options | |
|---------|--|
| EM | Emergency Battery Pack 10W ~1300 Lumens |
| EM5 | Emergency Battery Pack 5W ~650 Lumens |
| EM7 | Emergency Battery Pack 7W ~900 Lumens |
| EM4F | Emergency Battery Pack 4W ~450 Lumens |

NOTES:
¹Consult factory for Step Dimming Options

Lumens are subject to a tolerance of ±10%
Wattage is approximate and subject to a tolerance of ±5%



Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME


TYPE

TECHNICAL INFORMATION

2X2




TRANSVERSAL VIEW




LONGITUDINAL VIEW


2X4

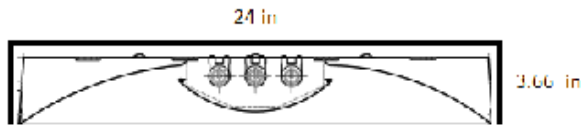


TRANSVERSAL VIEW

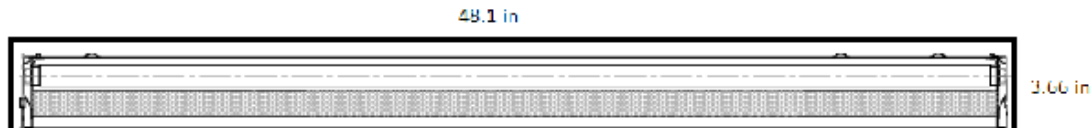

LONGITUDINAL VIEW



TRANSVERSAL VIEW



LONGITUDINAL VIEW

Dimensions and specifications subject to change without notice.



| | |
|----------|--|
| CAT# | |
| JOB NAME | |
| TYPE | |