


PHOTOMETRICS

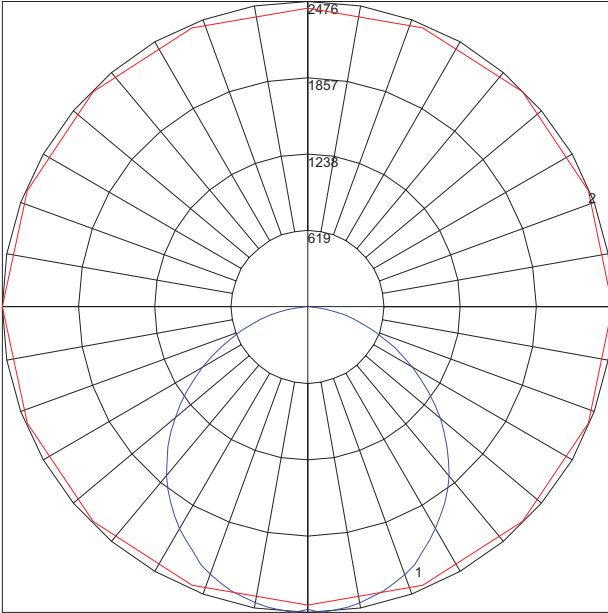

Maximum Candela = 2476 Located At Horizontal Angle = 0, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

IES INDOOR REPORT

PHOTOMETRIC FILENAME : SSKY24254PFMV.IES

CHARACTERISTICS

Lumens Per Lamp	4400 (2 lamps)
Total Lamp Lumens	8800
Luminaire Lumens	7666
Total Luminaire Efficiency	87 %
Luminaire Efficacy Rating (LER)	66
Total Luminaire Watts	116
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.38
Spacing Criterion (Diagonal)	1.46
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	1.81 ft
Luminous Height	0.00 ft

Candela Distribution																				
Effective Floor Cavity Reflectance 0.20																				
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	104	104	104	104	101	101	101	101	97	97	97	93	93	93	89	89	89	87		
1	95	90	86	83	92	88	85	82	85	82	79	81	79	77	78	76	74	72		
2	86	78	72	67	83	77	71	66	74	69	65	71	67	63	68	65	62	60		
3	78	68	61	55	76	67	60	55	64	59	54	62	57	53	60	56	52	50		
4	71	60	53	47	69	59	52	46	57	51	46	55	49	45	53	48	44	42		
5	65	54	46	40	63	53	45	40	51	44	39	49	43	39	48	42	38	36		
6	60	48	40	35	58	47	40	34	46	39	34	44	38	34	43	38	34	32		
7	56	44	36	30	54	43	36	30	42	35	30	40	34	30	39	34	30	28		
8	52	40	32	27	50	39	32	27	38	31	27	37	31	27	36	30	26	25		
9	48	36	29	24	47	36	29	24	35	28	24	34	28	24	33	28	24	22		
10	45	34	27	22	44	33	26	22	32	26	22	31	26	22	31	25	22	20		



Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	