

**APPLICATIONS**

Commercial grade shallow surface mounted vandal resistant fluorescent fixture. For use in high abuse indoor applications such as schools and public buildings and any area where security is the primary consideration.

**FEATURES & BENEFITS**

- ◆ The ultimate in vandal resistant enclosed security fixtures
- ◆ Virtually indestructible UV stabilized lens is .177" clear polycarbonate
- ◆ Lens has a pyramidal prism design on bottom and vertical perimeter rib for maximum light control and efficiency
- ◆ Available in lengths from 24 to 48 inches - (2', 4' lengths)
- ◆ Fully gasketed to provide protection against dust, dirt, insects, moisture and other foreign dust particles
- ◆ Tamperproof screws are standard
- ◆ Every fixture individually tested
- ◆ UL Listed for damp location



**SPECIFICATIONS**

Housing is die-formed 20 gauge cold rolled steel. Finish is high reflectance baked white enamel. Injection molded, thick walled, clear prismatic diffuser is manufactured from high impact UV treated polycarbonate. Diffuser is held in place and secured with tamperproof stainless steel screws. Mounts over electrical junction box. Mounting holes are provided. Listed by and bears **UL** label.

**ORDERING DATA**

**EXAMPLE: SVP 2 32 MV B1**

SVP		Lamp Size		Ballast Type		Options*			
Series	# of Lamps	Lamp Size		Ballast Type		Options*			
<b>SVP</b>	1	1 Lamp	<b>17</b>	T8	24"	<b>MV</b>	Multivolt	<b>B1</b>	Battery backup 1 lamp
	2	2 Lamp	<b>24</b>	T5HO	22"	<b>PMV</b>	Program Start Multivolt	<b>B2</b>	Battery backup 2 lamp
			<b>32</b>	T8	48"	<b>DMV</b>	Dimming Multivolt	<b>RIF</b>	Radio interference filter
			<b>54</b>	T5HO	46"				

\*Call for additional options




Dimensions and specifications subject to change without notice.



CAT#		
JOB NAME		TYPE

**DIMENSIONS**

Dimensions in inches

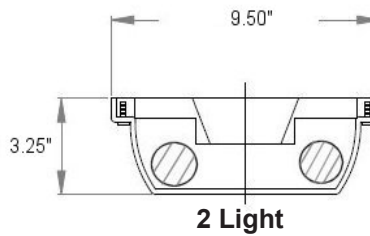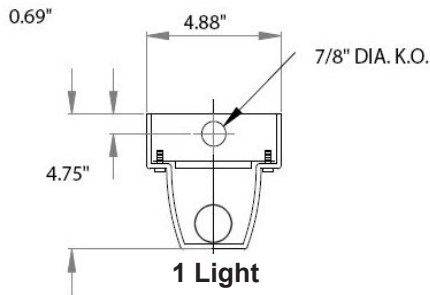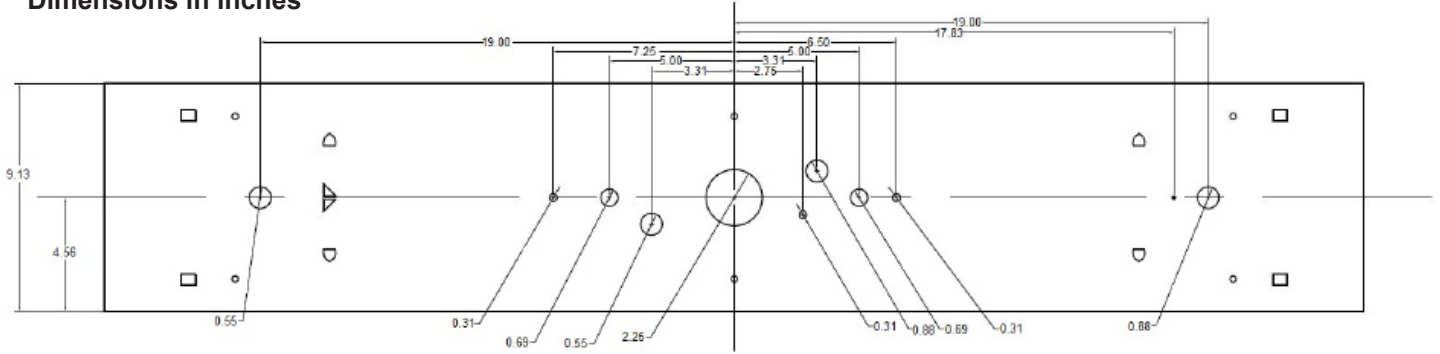

Dimensions and specifications subject to change without notice.

