

FEATURES & BENEFITS

- ◆ Wall or ceiling mount
- ◆ White powder coated aluminum base
- ◆ UL listed for wet locations
- ◆ Available in LED & incandescent

Small (WSPC)



Medium (WMPC)



SMALL/MEDIUM ORDERING DATA

EXAMPLE: WSPC-LED13D12030

Series	Gear	Wattage/Lumens ¹	Driver	Color Temp
WSPC WMPC	LED	13 13 Watts 1000 Lumens	D120 120VAC Triac Dimmable	30 3000K 40 4000K

INC ORDERING DATA


EXAMPLE: WSPCINCLED40

Series	Socket	Lamp Type (Optional)	Color Temp (Optional)
WSPC WMPC	INC Incandescent 120V 40W Max	LED 10Watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable Energy Star Certified Lamp	30 3000K 40 4000K

Notes:

¹Approximate lumens from LED source

DIMENSIONS

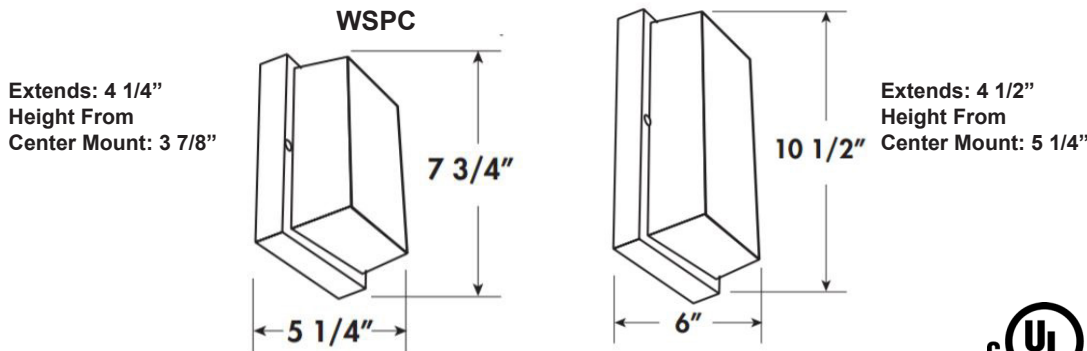

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	

FEATURES & BENEFITS

- ◆ Suitable for wet location
- ◆ Powder coated fitter
- ◆ Tamper proof screws
- ◆ Special made deeper housing
- ◆ White or clear polycarbonate, or white or clear acrylic lens

Large
(WLPC)





LARGE ORDERING DATA

EXAMPLE: WLPC-LED15DMVCA40

Series	LED Gear	Wattage/Lumens	Driver	Lens	Color Temp
WLPC	LED	15 15 Watts 1500 Lumens	DMV 120-277VAC 0-10V Dimmable	CA Clear Acrylic WA White Acrylic CP Clear Polycarbonate WP White Polycarbonate	40 4000K

DIMENSIONS

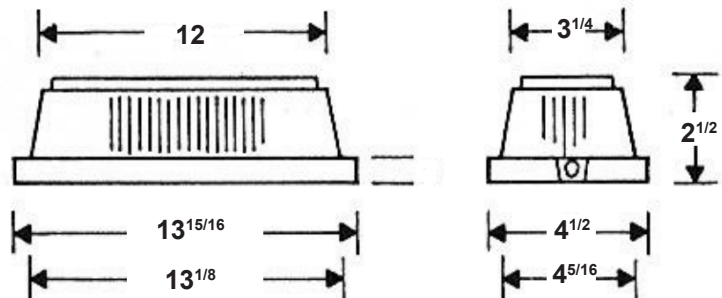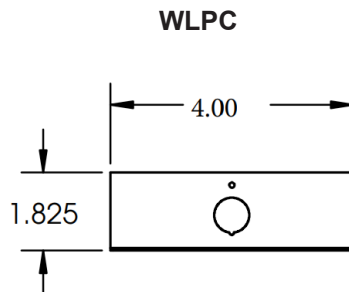

*Special Made Deeper housing for LED

*WLPC Lens Dimensions

Dimensions and specifications subject to change without notice.