


INSTALLATION INSTRUCTIONS FOR THE HC-301/302 HANGING KIT

APPLICATION: Pendant Mount Lighting

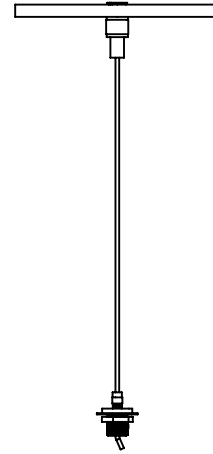

STOP! - READ THIS FIRST! - IMPORTANT SAFETY INSTRUCTIONS!

- Do not install damaged product. This kit is properly packed to prevent damage during transit.
- Use only for recommended pendant mount fixtures.
- Caution: Ends of cables may be sharp!
- Do not modify hanging kit in any way.
- Only mount to secure structures.

| | |
|--|--|
| Carefully read the instructions pertaining to this hanging kit thoroughly before beginning installation. | Please recycle. For information on how to recycle, please visit www.epa.gov . |
| Some features may vary slightly from images shown. | Do not install in applications other than intended use. |

1

Thread counter-sink screw in to cross bar in same direction as grounding screw. Fully tighten!

2

Attach cross bar to existing junction box (or equivalent).

3

Slide hanging cable in to cable cuff in direction shown. Slide all the way to cable stop.

4

CANOPY
CABLE CUFF

Slide canopy over counter-sink screw. Thread cable cuff on to screw until canopy is snug against ceiling.

5

CABLE CLUTCH NUT
ENTER HERE
CABLE CLUTCH ASSY

Check that cable clutch nut is near fully loosened. Bring end of hanging cable through top of cable clutch nut and out the bottom of the cable clutch ass'y (some shimmying may be required).

6

Bring stud ass'y through knock-out of fixture and secure with nut provided (use washers where needed for added security).