

Installation Instructions:

Locate hanging kits - there are 2 kits per 4ft or 8ft section, both kits install in similar ways




Non Power Feed Kit




Power Feed Kit


Insert screw through junction box plate and tighten. Install to junction box.

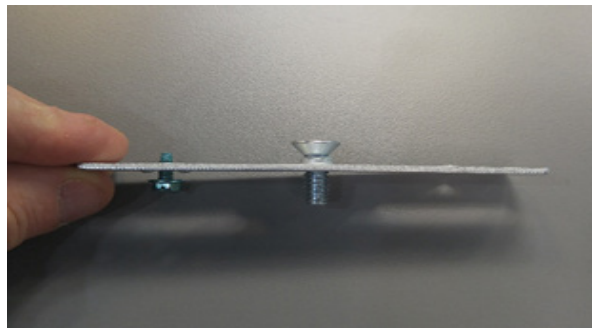

Non power feed: feed cable through ferrule

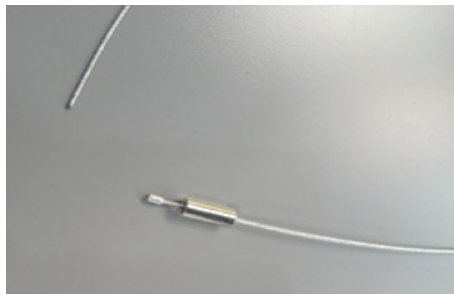

Install canopy to junction box and tighten ferrule:

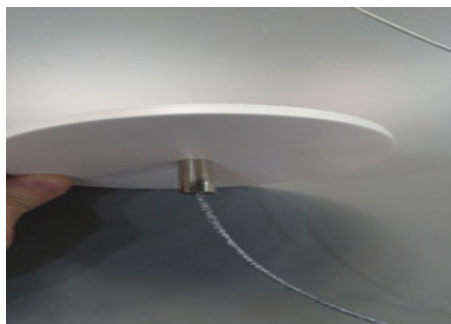

Power Feed:

Feed cable through ferrule (picture 1)

Picture 2:

Feed power cord through canopy, wire per proper code approved procedure

Install canopy junction box using cable hanging ferrule and tighten

Install power cord strain relief

Install wire ties to hold cord to hanging cable - optional




Picture 1



Picture 2

Insert cable into large ferrule

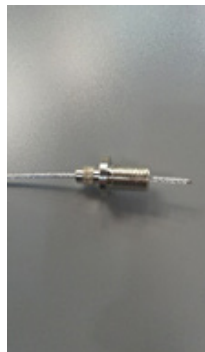

Insert large ferrule into fixture, adjust position in slotted channel and tighten. Adjust hanging length by pulling cable through Ferrule- when length is set, tighten small ferrule nut to lock cable in place.

Please note that cord can come through housing in 2 different locations, depending upon mounting.

