


****Installation of these products should only be performed by a qualified electrician.****

Access Plate
w/(2) 7/8" K.O.'s

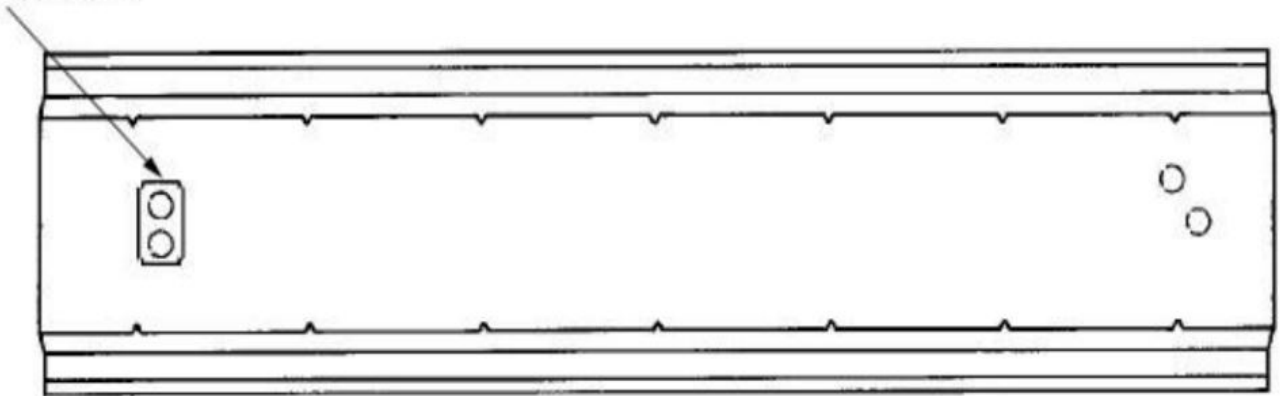

1. Follow the steps below to install the fixture(s) into a NEMA Type "G" ceiling system:
 - a. Raise the fixture through the ceiling opening and rest the fixture in the grid system.
 - b. Center the fixture within the opening.
 - c. Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
 - d. Refer to local codes for other installation requirements.
2. Once the fixture is installed into the ceiling system, follow the steps below to complete necessary connections:
 - a. Remove access plate on the back of the fixture (see illustration above).
 - b. Remove ballast supply wires from access plate.
 - c. Make wire connections in accordance with local codes. Ground screw is provided on access plate.
 - d. Re-install access plate.

NOTE: Refer to individual product specification sheets for further information.