




JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Put light exactly where you need to. This LED tape light is the most versatile way to add lighting in many applications. Simply determine the length you need, calculate the wattage to specify the correct driver and install with simple installation. Each piece is 12 inches long and can be cut every 4 inches. Sections can be joined together as needed up to 30ft. LEDT-5050L24V LED tape light is a colorful way to spice up an area. It comes in 3 color temperatures: 2700K, 3000K, and 4000K. Use LEDT-5050L24V to add some pizzazz to restaurants, bars, coves, wine racks, and areas needing some colorful fun.

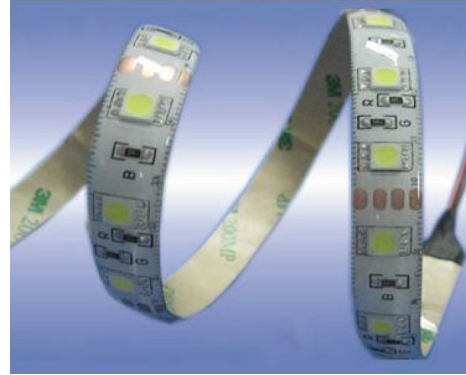

FEATURES & BENEFITS

- 4.32 Watts/ft
- High quality silicone coating
- $L_{70} > 50000$ hrs
- Min CRI 80
- 4-pin reversible connector
- 120° light distribution
- Maximum run of 30ft
- Self-adhesive tape (non-porous) or fastener/channel (porous)
- $cETL_{us}$ listed
- 3 year warranty

ORDERING DATA

Item No.	Description
LEDT-5050L24V27	SMD 5050, 2700K, 60LED/M, DC24V, 1ft/pcs, silicone glue waterproof, 15ft/reel
LEDT-5050L24V30	SMD 5050, 3000K, 60LED/M, DC24V, 1ft/pcs, silicone glue waterproof, 15ft/reel
LEDT-5050L24V40	SMD 5050, 4000K, 60LED/M, DC24V, 1ft/pcs, silicone glue waterproof, 15ft/reel

Specs At-A-Glance For 1ft Sections Of Tape

CRI	Color	Voltage	Wattage	LED Quantity	Lumen	Size
80	2700K ± 100K	DC24V	4.32W	18	180-189	300 x 10mm

Sample LEDT-5050L24V LED Tape Light System



Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

Drivers (choice of magnetic or electric drivers)

Magnetic driver from Magnetude is dimmable with any standard MLV Triac Dimmer or Electronic driver from AC Electronic is dimmable with 0-10 Volt dimming. See driver specification sheets for details.

Driver Options	
LEDD-MDCV24V20-120VHW	DRIVER LED CV 20W MLV DIM 24V 120V HW
LEDD-MDCV24V40-120VHW	DRIVER LED CV 40W MLV DIM 24V 120V HW
LEDD-MDCV24V50-120VHW	DRIVER LED CV 50W MLV DIM 24V 120V HW
LEDD-MDCV24V60-120VHW	DRIVER LED CV 60W MLV DIM 24V 120V HW
LEDD-MDCV24V96-120VHW	DRIVER LED CV 96W MLV DIM 24V 120V HW
LEDD-MDCV24V2X96-120VHW	DRIVER LED CV 2x96W MLV DIM 24V 120V HW
LEDD-MDCV24V3X96-120VHW	DRIVER LED CV 3x96W MLV DIM 24V 120V HW
LEDD-DCV24V30-MVHW	DRIVER LED CV 30W 0-10V DIM 24V 120-277V HW
LEDD-DCV24V60-MVHW	DRIVER LED CV 60W 0-10V DIM 24V 120-277V HW
LEDD-DCV24V96-MVHW	DRIVER LED CV 96W 0-10V DIM 24V 120-277V HW
LEDD-CV24V96-MVHW	DRIVER LED CV 96W NON-DIM 24V 120-277 HW

Hardwire Connector



Length	Item No.	Description
10 Feet	LEDT-CON-HW-10	10ft hardwire connect, one 4-pin female connector to 4-pin male connector, .22 AWG wire, sold in bags of 5

Extension Cables



Length	Item No.	Description
4 Inches	LEDT-EXT-4IN	4in extension, 4-pin female connector to 4-pin male connector, .22 AWG wire, for single color sold in bags of 5
1 Foot	LEDT-EXT-12IN	1ft extension, 4-pin female connector to 4-pin male connector, .22 AWG wire, for single color sold in bags of 5
3 Feet	LEDT-EXT-36IN	3ft extension, 4-pin female connector to 4-pin male connector, .22 AWG wire, for single color sold in bags of 5

Pattern Connector

Type	Item No.	Description
Male Connector	LEDT-CON-MM	4-pin male connector to 4-pin male connector, Allows you to re-use ONLY the "cut" end of a piece of LED tape light, sold in bags of 5
T-Connector	LEDT-CON-MMT	T-connector, used to connect 2 runs of LED tape light to 1 power cable, Two 4-pin female connectors to One 4-pin male connector, .22 AWG wire, sold in bags of 5

Dimensions and specifications subject to change without notice.

