



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This kit is designed to convert most recessed fluorescent 1x4, 2x2 and 2x4 troffers and parabolics to long-life and efficient LED technology. These kits provide everything required to enhance the performance and energy savings of your recessed fixture while minimizing labor, clean up and expense. Kits include high-reflectance reflector with driver, LED boards and tek screws for easy assembly. Kits install with simple hand tools in minutes.


The RKT-LED retrofit kits mount easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The driver is attached to the backside of the reflector.



FEATURES & BENEFITS

- Constant Current LED Driver
- Input Voltage: 120-277V AC
- Input Frequency: 50/60Hz
- Reflectors are precision formed and high performance
- _cETL_{US} recognized as retrofit
- DLC listed in certain models

DIMENSIONS

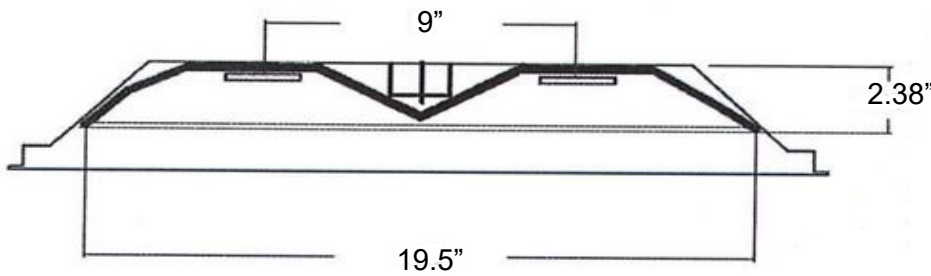

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RKT 14 LED 35 DMV 30 SS

RKT		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		7. COLOR TEMP		7. SENSOR (O) ¹
RKT Retrofit Kit	14 1X4 Troffer Parabolic	LED	Standard 1X4		DMV	120-277V Multivolt 0-10V Dimmable	30 3000K 35 3500K 40 4000K 50 5000K	SS	Integrated Sensor
			35 35 Watt 4320 Lumens	20 20 Watt 2300 Lumens					
			48 48 Watt 5680 Lumens						
	22 2X2 Troffer Parabolic	LED	Standard 2X2		SDMV	Step dimming multivolt	30 3000K 35 3500K 40 4000K 50 5000K	SS	Integrated Sensor
			20 20 Watt 2300 Lumens	24 24 Watt 2800 Lumens					
			24 24 Watt 2800 Lumens						
	24 2X4 Troffer Parabolic	LED	Standard 2X4		D347	347VAC 0-10 Dimming	30 3000K 35 3500K 40 4000K 50 5000K	SS	Integrated Sensor
			20 20 Watt 2300 Lumens	28 28 Watt 3200 Lumens					
			24 24 Watt 2800 Lumens						
			28 28 Watt 3200 Lumens	35 35 Watt 4100 Lumens					
			35 35 Watt 4100 Lumens						
			45 45 Watt 4470 Lumens						
		Standard 2X4		D120	Triac Dimming 120VAC	30 3000K 35 3500K 40 4000K 50 5000K	SS	Integrated Sensor	
35 35 Watt 4320 Lumens	45 45 Watt 4470 Lumens								
48 48 Watt 5680 Lumens									
		Standard 2X4		D277	Triac Dimming 277VAC	30 3000K 35 3500K 40 4000K 50 5000K	SS	Integrated Sensor	
35 35 Watt 4320 Lumens	57 57 Watt 6500 Lumens								
48 48 Watt 5680 Lumens									
		57 57 Watt 6500 Lumens							

*Consult for other wattages

DLC INFORMATION

DLC Listed	
RKT22-LED20DMVxx	xx=30,35,40,50
RKT22-LED24DMVxx	xx=30,35,40,50
RKT22-LED28DMVxx	xx=30,35,40,50
RKT22-LED35DMVxx	xx=30,35,40,50
RKT22-LED45DMVxx	xx=30,35,40,50
RKT24-LED35DMVxx	xx=30,35,40,50
RKT24-LED48DMVxx	xx=30,35,40,50
RKT24-LED57DMVxx	xx=30,35,40,50



Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

