



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series 215

Wall Mount, Up & Down Light, Rectangular Profile

The 215 is a specification grade wall mount for "over the bed" applications and may also be used in bath, stairwells and office applications. This luminaire carries up to eight LED boards. With optional dividers, front baffles and dual drivers the up and down light are individually controlled. The rectangular shape provides a clean, crisp profile.

CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel. Standard finish is high reflectance baked white enamel; custom finishes are available as an option. Wiring knockouts are provided on back of housing. The clear, ribbed lens is fully captured by the end plate. End cap held in place with acorn nut.

MOUNTING

Direct wall mount

TYPICAL OPTIONS & ACCESSORIES

Custom finished, internal divider, front baffle, pull chains, convenience outlets. Contact factory for more details.



DIMENSIONS

2ft. - 4.50"H x 24.0"L x 5.62"W
4ft. - 4.50"H x 48.0"L x 5.62"W

FEATURES & BENEFITS

- Optional front baffle restricts light to up and down only (no front light). Add dual drivers for separate control of up and down light.
- Options include pull chain switches and convenience outlets.
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volts dimmable 120-277V
- Power factor 0.90
- 5 year warranty



ORDER INFORMATION

Standard

SERIES	LENS MATERIAL	LENGTH	LED MODULE DISTRIBUTION	WATTAGE & LUMENS	BAFFLE	DRIVER
215	A Clear Acrylic	24L 24"	1U1D One row LED uplight, One row LED downlight	Y24W2400L 24 Watts 2500 Lumens	Blank Divider DF Front Baffle	DMV 0-10V Dimming
			1U2D One row LED uplight, Two rows LED downlight	Y36W3600L 36 Watts 3600 Lumens		
			2U2D Two rows LED uplight, Two rows LED downlight	Y48W4800L 48 Watts 4800 Lumens		
			2U1D Two rows LED uplight, One row LED downlight	* *		
		48L 48"	Y48W4800L 48 Watts 4800 Lumens			
			Y73W7200L 73 Watts 7200 Lumens			
			Y97W9600L 97 Watts 9600 Lumens			
			* *			

CCT	OPTIONS
30K 3000K	SW2 Pull chain, 2 way switching (Use with single ballasts)
35K 3500K	GCO Grounded convenience outlet (North American prong)
40K 4000K	
50K 5000K	


PART NUMBER	LEDS MODULE DISTRIBUTION
215A24L1U1DY24W2400LDFDMV40K	One row LEDs uplight, One row LEDs downlight
215A24L1U2DY36W3600LDFDMV40K	One row LEDs uplight, Two row LEDs downlight
215A24L2U2DY48W4800LDFDMV40K	Two row LEDs uplight, Two row LEDs downlight
215A24L2U1DY36W3600LDFDMV40K	Two row LEDs uplight, One row LEDs downlight
215A48L1U1DY48W4800LDFDMV40K	One row LEDs uplight, One row LEDs downlight
215A48L1U2DY73W7200LDFDMV40K	One row LEDs uplight, Two row LEDs downlight
215A48L2U2DY97W9600LDFDMV40K	Two row LEDs uplight, Two row LEDs downlight
215A48L2U1DY73W7200LDFDMV40K	Two row LEDs uplight, One row LEDs downlight

*Programmable LED drivers allow custom configured wattages and corresponding lumens.


NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

Back - 2Ft.

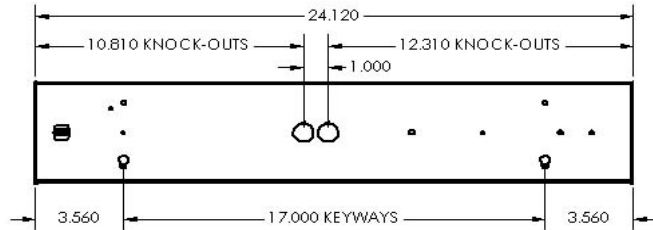

Back - 4Ft.

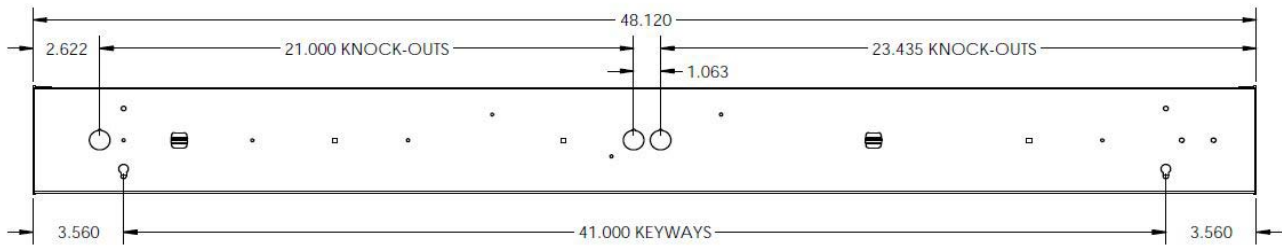

End

