



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS

The RKSR (Strip Reflector) and RKSC (Strip Ballast Cover) Universal Retrofit Kits are designed for 4' or 8' industrial and strip fixtures and install with simple hand tools. The universal socket bracket is designed for simple fit to most standard channels from 4" to 5 1/4" in width. The Reflector/Ballast Cover mount to final wired socket brackets with 2 quarter-turn fasteners for easy maintenance after retrofit is complete. Components are shipped separately in unit packages.

- Lamps are secured with rotary locking lamp sockets
- Lamp socket accepts No. 18 gauge wire, either solid, solder dipped or twisted-tinned or fuse wire.
- Reflectors are precision formed and high performance
- Premium aluminum mirrored specular reflector has greater than 91% reflectivity
- Premium aluminum mirrored specular reflector or enhanced white reflector
- Ballast cover kit - white only, 4 1/4" standard - 5 1/4" optional
- Suitable for damp locations
- UL Listed sockets and ballast components

The RKSR and RKSC universal strip retrofit kits mount easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The new reflector/ballast cover is then attached to the existing strip channel with a universal socket bracket and self-tapping screws. The universal socket bracket can fit channels from 4" to 5 1/4" in width. The kit reflector or ballast cover serves as the new ballast cover.


The most economical, practical, and user friendly series of LED fixtures with energy savings, quality of light, long life and hassle-free maintenance/ EZLED fixtures are UL listed with the latest LED T8 bypass lamps. These fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required). The also provide the flexibility to change the wattage and color temperature at any time. Are you concerned about maintenance with an LED array and driver fixture? EZLED resolves that issue by utilizing a self-contained LED lamp that fits into your fixture just like the classic fluorescent tube. The fixture performance will evolve over time with the evolution of the T8 LED lamp technology, and our five-year warranty guarantees a reliable, high quality product.

### Emergency Options

The standard EZ LED Lamps require an inverter or an All-in-one emergency kit that includes LED array, battery and driver. Dimmable T8 LED with external driver works with standard LED EM it. See emergency options and specs at [www.mobern.com/EZLEDEmergency](http://www.mobern.com/EZLEDEmergency).

### Optional Dimming

The 4 foot lamps are available with a dimming option. Specially designed dimming lamps require an external driver that runs 1 or 2 lamps (more than 2 lamps require multiple external drivers).

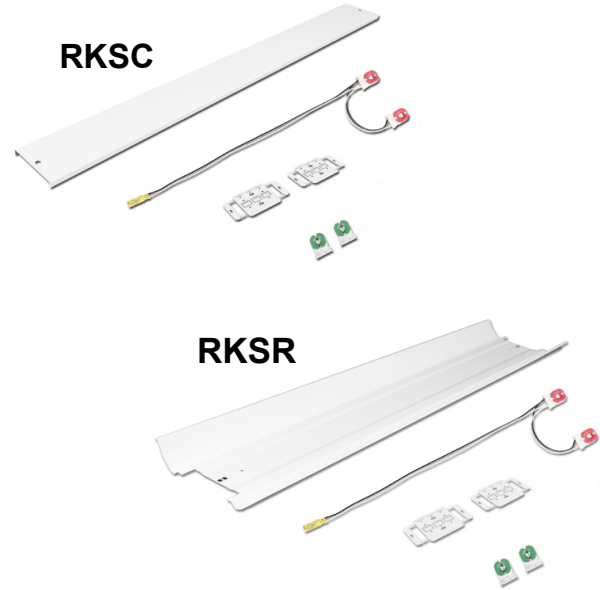

## FEATURES & BENEFITS

Our EZLED fixtures come standard with SaveGreen T8 LED lamps. They are available in 2 or 4 foot sizes in different wattage, lumens, and color temperature options (see lamp options and specifications at [www.savegreenlighting.com](http://www.savegreenlighting.com)).

- L70 > 50000 hrs.
- Operating temperature: -20°C to 50°C
- Color Temperature: 3500K, 4000K, 5000K
- G13 pins (same as fluorescent linear T8 bipin)
- AC100-277V
- Integral driver (non-isolated) eliminates the need for external driver or ballast
- Environmentally friendly, no mercury used
- UL Classified
- Min CRI 80
- 5 year warranty

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: RKSC 1 32 LED L15W 830 W INV5 WR

1. SERIES	2. # OF LAMPS	3. LAMP TYPE	4. GEAR	5. LAMP WATTAGE	6. COLOR TEMP
<b>RKSC</b> Strip Kit w/ Ballast Cover	<b>1</b> 1 Lamp	<b>32</b> 48 inch T8	<b>LED</b> 1 end hot for T8 or T5 LED tubes	<b>T8 OPTIONS</b>	<b>830</b> 3000K
	<b>2</b> 2 Lamps	<b>32TAN</b> 2-48" T8 Tandem	<b>LED2E</b> 2 ends hot for T8 or T5 LED tubes	<b>2 ft.</b>	<b>835</b> 3500K
<b>RKSR</b> Strip Kit w/ Reflector	<b>3</b> 3 Lamps	<b>54</b> 46 inch T5HO		<b>L7W</b> 7 Watts 950 Lumens <u>Keystone</u>	<b>840</b> 4000K
	<b>4</b> 4 Lamps			<b>L9W</b> 9 Watts 1050 Lumens <b>4 ft.</b>	<b>850</b> 5000K
				<b>L12W</b> 12.5 Watts 1750 Lumens <u>Keystone</u>	
				<b>L15W</b> 15 Watts 1740 Lumens	
				<b>L18W</b> 18 Watts 2100 Lumens	
				<b>T5 C</b> <u>ions</u>	
				<b>L25W</b> 25 Watts 3300 Lumens	

7. LAMP BRAND	8. REFLECTOR	9. INVERTER (O) <sup>2</sup>	10. WIRING (O) <sup>2</sup>
<b>Blank</b> House Brand	<b>W</b> High Reflective White	<b>INV5</b> 5W Integrated Inverter	<b>WR</b> Prewired for LED tubes <sup>3</sup>
<b>KEY</b> Keystone Brand	<b>M</b> High Reflective Mirror		
<b>JAM</b> James Brand <sup>1</sup>			

**Notes:**

- <sup>1</sup>Special order
- <sup>2</sup>(O) is optional
- <sup>3</sup>Must add WR for wired

Dimensions and specifications subject to change without notice.

