

FEATURES & BENEFITS

ILLUMINATION

- ◆ Ultra-bright, energy efficient, long life red or green LED
- ◆ UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination
- ◆ Double face utilizes factory installed silver or white mylar background panel

ELECTRICAL

- ◆ Dual 120V/277 voltage
- ◆ Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- ◆ 4.8V long life, maintenance-free, rechargeable NiCd battery
- ◆ Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- ◆ Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- ◆ Aluminum mounting canopy included for top, end, or back mount

HOUSING

- ◆ Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes)
- ◆ Self-adhesive chevron appliques and guide template provided for directional indication



OPTIONS

- ◆ SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- ◆ 2C: Dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time (one acting as a back-up to the other)
- ◆ SPV: UL Listed for special voltage option

WARRANTY / LISTING

- ◆ Five year warranty on all electronics and housing. Battery pro rated for five years
- ◆ Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- ◆ UL Listed for damp locations (0°C - 50°C standard)

ORDERING DATA

EXAMPLE: MEDELX W RC A 1


MEDELX

Series	Housing Color	Letter Color	Panel Color	AC/Battery	# of Faces	Options
MEDELX	A Aluminum Housing ¹ W White Housing B Black Housing	R Red G Green	M Mirror W White C Clear ²	A AC B Battery Backup	1 Single Face 2 Double Face	SDT Self-diagnostics ⁴ 2C Dual circuit operation ⁵ SPV 208/220/240 Volt, 50/60Hz ³

Notes:

- ¹Aluminum Housing Color is Standard
- ²Available with single face only
- ³Not available with SDT
- ⁴Available only with EM battery backup units
- ⁵Available only with AC units

DIMENSIONS

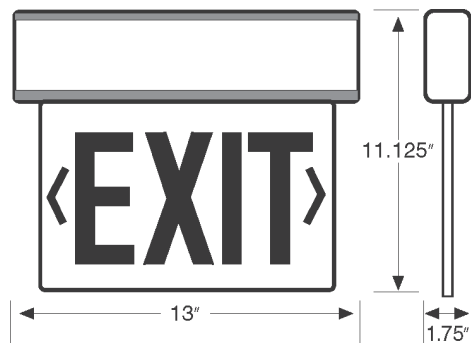

Dimensions and specifications subject to change without notice.

